

AQUA

SERIES SWAN

Heat pump water heater

**HIGH EFFICIENCY PRODUCTION OF
DOMESTIC HOT WATER**

SIMPLE VERSATILE INSTALLATION

WIDE OPERATING RANGE

SOLAR VERSION



Nominal thermal capacity (A15/W45)
From 1.6 kW to 2.2 kW

Storage tank of 190 and 300 litres



Table of contents

System Description	3
Introduction	3
System Configuration	3
Function Logic	3
Versions	4
Main Components	5
User Interface	6
Technical Specifications	7
General Information	7
Electrical Specifications	8
Operating Limits	8
Performance Curves	9
Dimensional and Installation	10
Dimensional Drawings	10
Hydraulic Connections	12
Aeraulic Connections	13
UNI-EN Information	14
11300 - 4	14

System Description

Introduction

AQUA is a specialised heat pump system for producing domestic hot water.

AQUA reduces costs connected with the production of domestic hot water. Using heat pump technology, AQUA is able to transform renewable energy contained in the air into heat, which it then uses to raise the temperature of water contained in the storage tank. The consumption of electrical power in this sequence is reduced to a minimum. AQUA is 4 times more efficient than a traditional electrical boiler, which in economic terms means a 75% reduction in cost for electricity for the same amount of thermal power produced. The AQUA systems is made with a single-piece unit comprising:

- an accumulation tank for water of 190 or 300 litres in steel with double vitrification and sacrificial anode to guarantee maximum durability over time.
- a high efficiency heat pump able to dispense a thermal power of 1.62 or 2.30 kW. The heat pump uses R134-a as a coolant, and is able to produce hot water that is hotter than a temperature of 65°C.
- a 1.5 kW electrical heating element as a back-up and/or integration, which can be enabled when temperatures are very cold or for integration during the disinfection cycle or if the heap pump malfunctions.
- steel coil for integrating heat from solar sources. (Only on some models)

The heating phase of the domestic water stored in the tank happens mainly through the condenser of the heat pump, which is formed from a copper pipe wrapped around the outside of the hot water tank. This makes it possible to avoid contaminating the water in any way, and makes the system completely safe.

Function Logic

The production of domestic hot water can be done, depending on the operating conditions, by using the heat pump and/or electric integration or solar heat (if the model is equipped with a solar coil).

Sunlight is completely renewable and free, and therefore is always preferable. It is enabled first if the conditions for solar irradiation and temperature are favourable. In absence of available sunlight, or in the versions which do not have that option, the AQUA control panel uses the heat pump as the main generator for producing domestic hot water, because it is more efficient and economically more convenient than the electric heater.

The heat pump uses the ambient air as a heat source: as the cooling fluid evaporates inside the exchanger, it subtracts heat from the environment, then the fluid passes through the compressor and its pressure and temperature are raised. Subsequently, the fluid releases heat into the water in the tank through a condenser made up of a copper coil wrapped around the outside of the steel storage tank, with a shaped profile to maximise the efficiency of the exchange. The water accumulated in the tank makes it possible to store and preserve the heat for a long time, thanks to its thick insulation. To complete the cycle, the coolant passes through the expansion valve and reduces its pressure to become available again to absorb heat from the air.

The heat pump can work in a wide range of air temperatures, from -7°C to +43°C, thus guaranteeing a level of efficiency superior to an electric boiler, even in harsher temperatures. The heat pump can bring the water inside the tank to temperatures exceeding 65°C.


The electrical heating element present on all models enables autonomously depending on the air temperature at intake and/or in relation to the pre-set water temperature. If the air temperature falls below -7°C, the control panel turns the heap pump off and enables the electrical heating element. The electrical heating element is enabled if the hot water temperature is set above the temperature that can be reached by using only the heat pump under some operating conditions.

The electrical heating element can also intervene as a back-up in case of error or malfunction of the heat pump.

The anti-legionella cycle is performed automatically every 7 days. The control panel compares the temperature in the water tank with the temperature set for the anti-legionella cycle. If the temperature in the tank is lower than the set temperature, it uses the heat pump to bring the water in the tank to the maximum reachable temperature. Then it turns the heat pump off and enables the electrical heating element to complete the last step and bring the water in the tank to a suitable temperature for disinfection. It is also possible to activate the anti-legionella cycle manually.

Using the specific button on the control panel (on the boiler), it is possible to enable the electrical heating element manually.

System Configuration

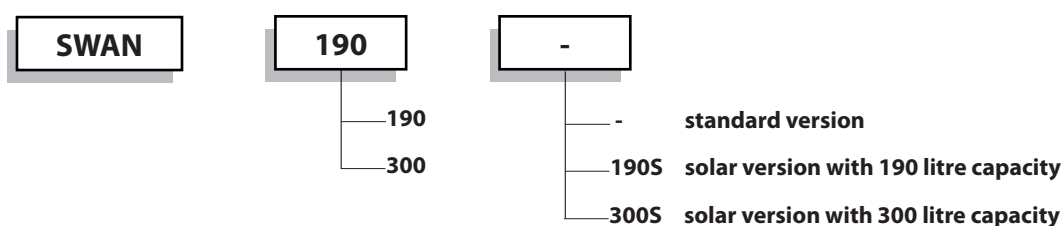

Versions



2017 ready




2017 ready

TOP Efficiency

AQUA reaches the highest levels of efficiency present at this moment on the market. Thanks to the careful design of the cooling circuit, it has been placed in the class **A+** according to the ErP Directive.

The high values of COP allow for significant savings in energy and operating costs, in addition to an increased use of renewable energy.

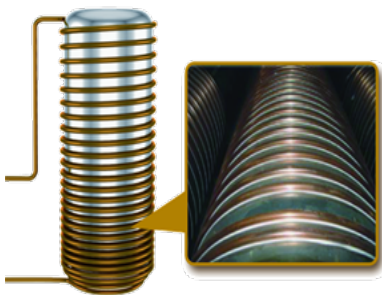

Enamel Steel Tank with heat exchanger wrapped around the tank

All versions of this product have the enamel steel tank for heating domestic water and the anode in manganese. These parts ensure maximum protection against corrosion and a longer product lifespan. The heat exchanger (condenser) is made up of a coil in **COPPER** wrapped around the outside of the hot water storage tank. This feature guarantees maximum safety because it prevents any possible contamination between the refrigerant and the water. Before the copper condenser is wrapped around the tank, it is shaped to obtain an innovative profile designed to maximize the surface in contact with the tank and improve thermal exchange.



Full Operating Limits

The use of the most advanced technologies, both in terms of components and in relation to regulating logic, allow AQUA to be used in extreme temperatures. AQUA can function within the air temperature range of -20°C to +43°C in combined operation (heat pump + electrical heating element) and even in the range of -7°C to +43°C with only the heat pump. Moreover, it is possible to reach hot water temperatures exceeding 65°C using only the heat pump.

4 Available Versions

To provide the best range of products, AQUA offers four solutions:

- **AQUA 190:** Heat pump 1.62 kW with 180 litre hot water tank and electrical heating element using 1.50 kW input.
- **AQUA 300:** Heat pump 2.30 kW with 280 litre hot water tank and electrical heating element using 1.50 kW input.
- **AQUA 190 S:** Heat pump 1.62 kW with 180 litre hot water tank and electrical heating element using 1.50 kW input and with solar coil sized at 1.1 m²
- **AQUA 300 S:** Heat pump 2.30 kW with 280 litre hot water tank and electrical heating element using 1.50 kW input and with solar coil sized at 1.3 m²

Components

FAN

Centrifugal fan with plastic profile blades, housed in aerodynamically shaped nozzle to increase efficiency and minimize sound level.

EVAPORATOR

Evaporator coil with large surface which improves heat transfer and reduces defrost time in order to increase the seasonal efficiency

ANODE

Magnesium sacrificial anode to ensure maximum protection and durability over time

HANDLES

Lifting handles for easy installation and transportation

CONDENSER

Condenser with copper coil, wrapped around the tank and thus avoid the possibility of water contamination for any leaks of refrigerant. The coil is suitably shaped to maximize the contact area with the fuel tank, it is also interposed with a conductive paste to improve heat exchange between the capacitor and the accumulation.

COMPRESSOR

Rotary ON/OFF Compressor using R134a on vibration rubber to minimize the transmission of vibration and noise.

SAFETY THERMOSTATS

- Automatic temperature reset thermostat (ATCO auto temperature cut off)
- Manual reset thermostat (TCO temperature cut off)

ELECTRIC HEATER

1,5kW electrical element can be used for heating when the temperatures is below -7°C and/or to integrate with rigid air temperatures and high set temperatures.

INTEGRATION EXCHANGER


Integration exchanger vitrified steel coil of 1.1m² on 190L and 1.3m² on 300L with well for probe for regulation

TANK


Steel storage tank for 280/180 liters of water, internally vitrified to completely isolate water from the metal to avoid corrosion problems

INSULATION

External insulation in polyurethane (thickness 50mm)

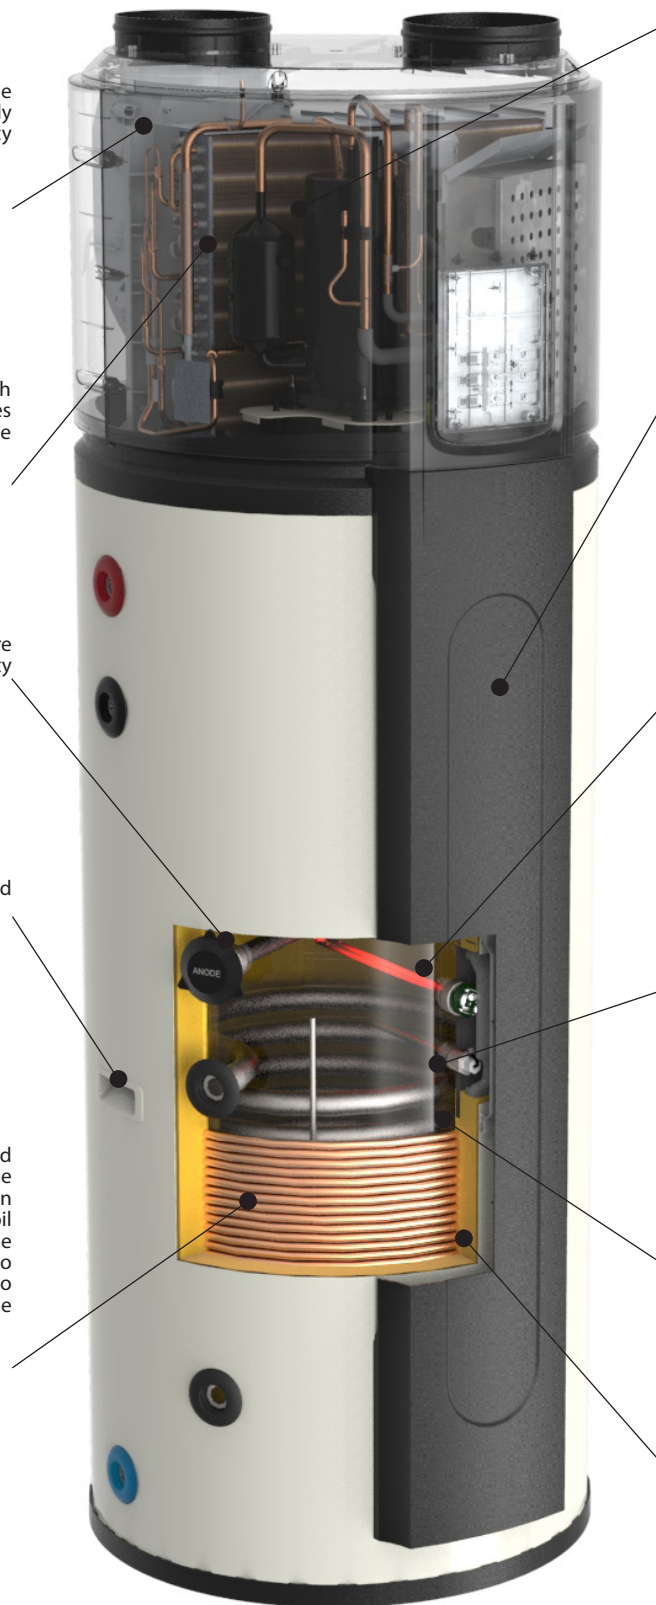

User Interface

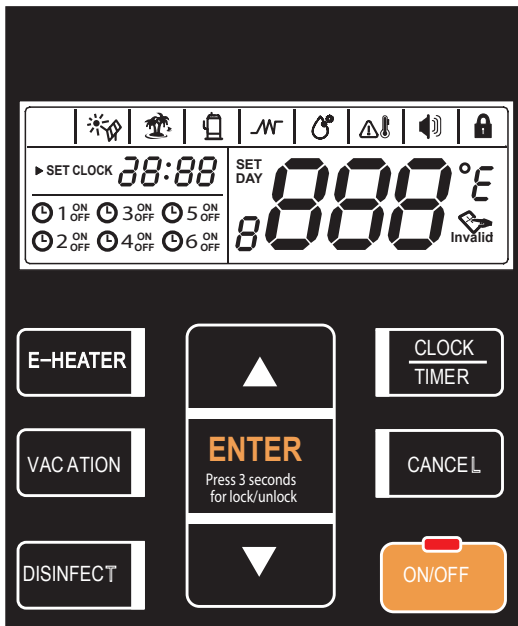

To control AQUA, it is possible to use the control panel mounted on the unit.


The control system was designed to be quick and intuitive for the user. All parameters are easily accessible with the 9 central buttons.

The control panel allows the user to view:

- Current water temperature
- Unit operating status
- The operating status of the compressor and the electric heating element
- Any possible malfunction

and to set:

- The SET temperature of the accumulator
- The unit's schedule, up to six activation or deactivation times
- Manual activation of the electric heating element
- Manual activation of the anti-legionella disinfection cycle
- Switching the unit on and off

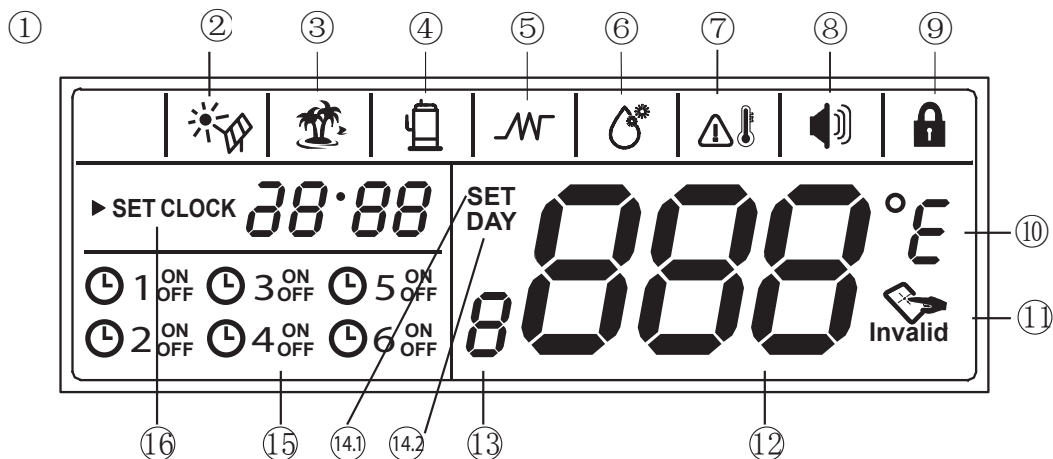

Ref	Icon	Description	Ref	Icon	Description
1	Display		10	°E	Temperature unit of measurement (°C or °F)
2		External solar source	11	Invalid	Typing error
3		Holiday mode	12	888	3 displays with 8 segments
4		Status of the compressor	13	8	display with 8 segments reserved for assistance
5		Status of the electrical heating element	14.1	SET	Icon indicating the SET entry mode
6		Disinfection mode	14.2	DAY	Icon indicating how to set the day in holiday mode
7		High temperature alarm	15		Timer for scheduling
8		Alarm	16	SET CLOCK 28:88	Set time
9		Block screen			

Technical Specifications

General Technical Specifications

Sizes			190	300	190S	300S
Power and Efficiency						
Tout 15/12 °C (DB/WB), Tw,in 15 °C Tw,in 45 °C	Thermal power	kW	1,62	2,30	1,62	2,30
	Total power absorbed	kW	0,42	0,53	0,42	0,53
	COP		3,86	4,34	3,86	4,34
Tout 43/26 °C (DB/WB), Tw,in 10 °C Tw,out 70°C--> 190 Tw,out 65°C--> 300	Thermal power		2,31	3,25	2,31	3,25
	Total power absorbed		0,546	0,627	0,546	0,627
	COP		4,23	5,18	4,23	5,18
Electric heating element		kW	1,50	1,50	1,50	1,50
Standard power supply		V	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50
Heating time ACS	(1)	h/min	3/53	4/22	3/53	4/22
Maximum temperature ACS	(6)	°C	70	70	70	70
Level of sound pressure (1m)	(5)	dB(A)	36,6	38,2	36,6	38,2
Sound power (volume) (L _{WA})		dB(A)	51	53	51	53
ErP						
Average Climate Heat pumps Water Heater (2)	Energy class of generator		A+	A+	A+	A+
	Domestic hot water profile		L	XL	L	XL
	η _{wh}	%	115	123	115	123
	Annual consumption AEC	kWh	890	1356	890	1356
	Daily consumption	kWh	4,22	6,34	4,22	6,34
	COP EN 16147		2,76	3,01	2,76	3,01
Warmer Climate Heat pumps Water Heater (3)	Domestic hot water profile		L	XL	L	XL
	η _{wh}	%	125	143	125	143
	Annual consumption AEC	kWh	819	1173	819	1173
	Daily consumption	kWh	3,86	5,49	3,86	5,49
Colder Climate Heat pumps Water Heater (4)	Domestic hot water profile		L	XL	L	XL
	η _{wh}	%	99	91	99	91
	Annual consumption AEC	kWh	1034	1845	1034	1845
	Daily consumption	kWh	4,90	8,56	4,90	8,56
Domestic Hot Water Accumulator						
Volume of Domestic hot water Accumulator	l		176	284	168	272
Material of accumulator tank			Enamel Steel	Enamel Steel	Enamel Steel	Enamel Steel
Maximum operating pressure	bar		10	10	10	10
Insulation Material			Polyurethane foam	Polyurethane foam	Polyurethane foam	Polyurethane foam
Insulation Thickness	mm		50	50	50	50
Refrigerant Circuit						
Compressor type			Rotary	Rotary	Rotary	Rotary
Coolant Gas			R134a	R134a	R134a	R134a
Quantity of coolant	kg		1,10	1,50	1,10	1,50
GWP	t		1430	1430	1430	1430
Tonne of CO2 equivalents *	t _{CO2}		1,57	2,14	1,57	2,14
Oil quantity	ml		350	350	350	350
Type of expansion valve			Electronic	Electronic	Electronic	Electronic
Ventilation						
Type of fan			Centrifugal	Centrifugal	Centrifugal	Centrifugal
Air flow	m³/h		270	414	270	414
Available pressure head	Pa		25	25	25	25
Integration						
Integration coil surface	m²		-	-	1.10	1.30
Integration coil material			-	-	Enamel Steel	Enamel Steel
Maximum operating pressure	bar		-	-	10	10

1. Inlet water temperature 15 °C, accumulator set 45°C, air on source side 15°C D.B /12°C W.B.

2. The product complies with the European Directive ErP, which includes the Commission Delegated Regulation (EU) N. 812/2013 and the Commission Delegated Regulation N. 814/2013, Average Climate, Heat Pump Water Heater

3. The product complies with the European Directive ErP, which includes the Commission Delegated Regulation (EU) N. 812/2013 and the Commission Delegated Regulation N. 814/2013, Warmer Climate, Heat Pump Water Heater

4. The product complies with the European Directive ErP, which includes the Commission Delegated Regulation (EU) N. 812/2013 and the Commission Delegated Regulation N. 814/2013, Colder Climate, Heat Pump Water Heater

5. Data referred to completely ducted unit.

6. Maximum temperature that can be reached during anti-legionella mode (Disinfect)

* It contains fluorinated greenhouse gases

Electrical Specifications

Size		190	300	190S	300S
Power supply (1)	V	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50
F.L.A. - Current absorbed at the maximum allowed conditions	A	9,10	9,80	9,10	9,80
F.L.I. - Power absorbed at full load (at the maximum allowed conditions)	kW	2,10	2,25	2,10	2,25
M.I.C - Maximum inrush current	A	22,2	33,7	22,2	33,7

(1) Power supply 220-240/1/50

For non-standard power supply voltages, contact the Clivet Technical Office

Units are compliant with provisions set forth in the European standards CEI EN 60204 and CEI EN 60335


Warning: when defining the correct size, verify that all absorption is compliant with current electrical supply contracts in force in the country of installation

Operating Limits

T_{wI} [°C] = water temperature in the accumulator


T_{aE} [°C]: air temperature at exchanger inlet

AQUA 190 - 190S

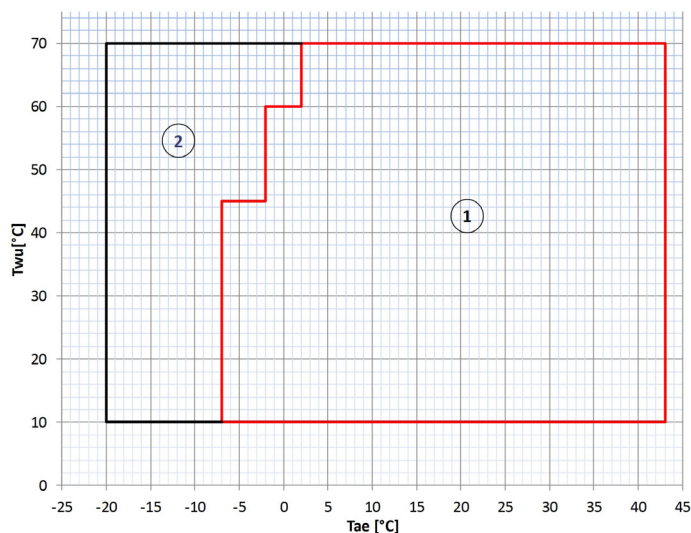

1. Use range of the heat pump
2. Use range of the electrical heating element

AQUA 300 - 300S


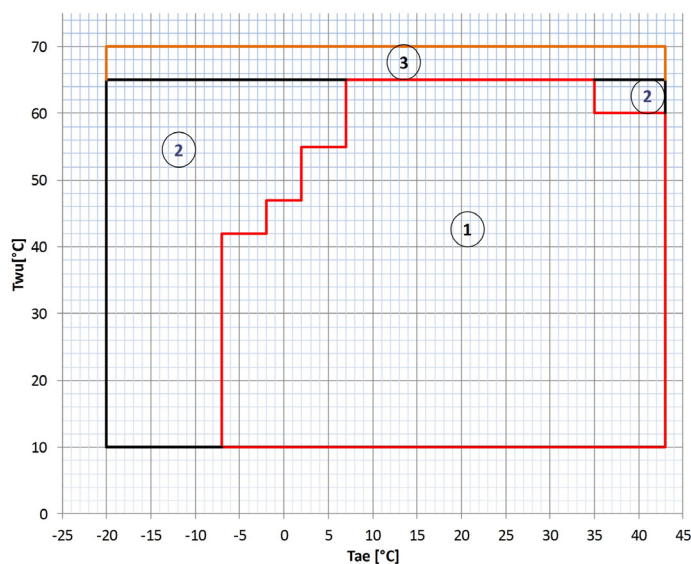


1. Use range of the heat pump
2. Use range of the electrical heating element
3. Use range of the electrical heating element only in Anti-Legionella mode (Disinfect)



Performances Curve

The following curves were obtained from performance tests carried out under dynamic mode. The inlet water temperature, which coincides with the initial status 0, is temperature 10°C. The different curves represent the specific parameter (heating time, heating capacity, COP) with different set temperature (45° C-50° C-55° C-60° C-65° C to 70° C)



Heat UP

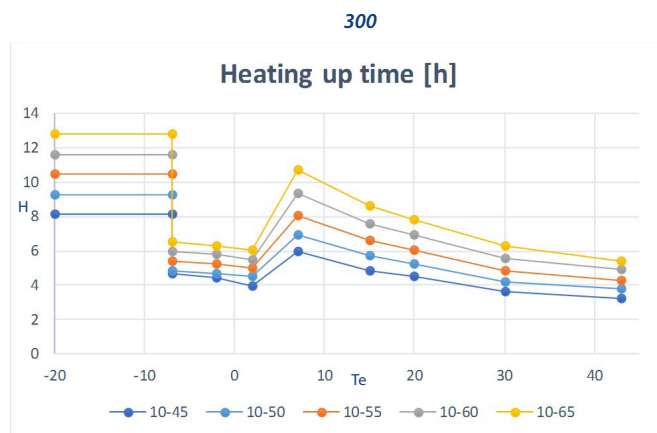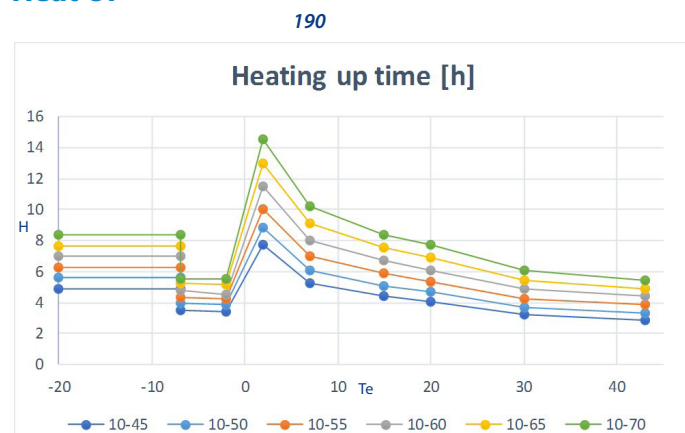

Heating Capacity

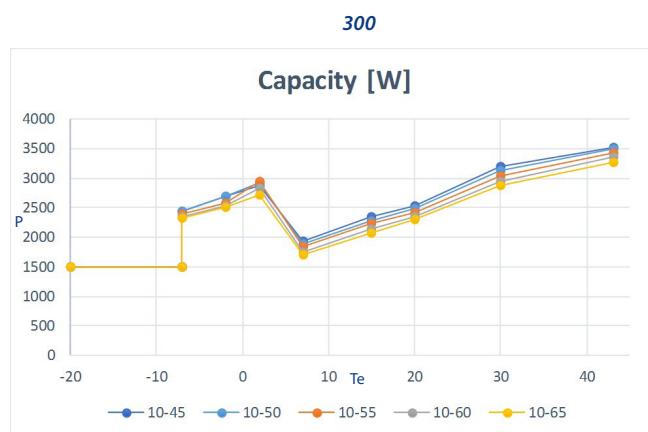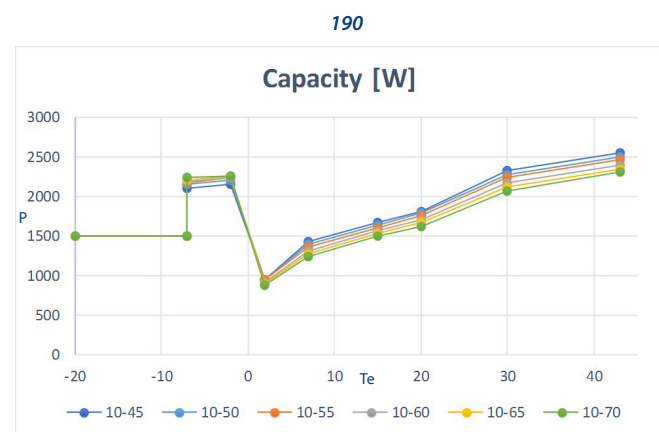

COP

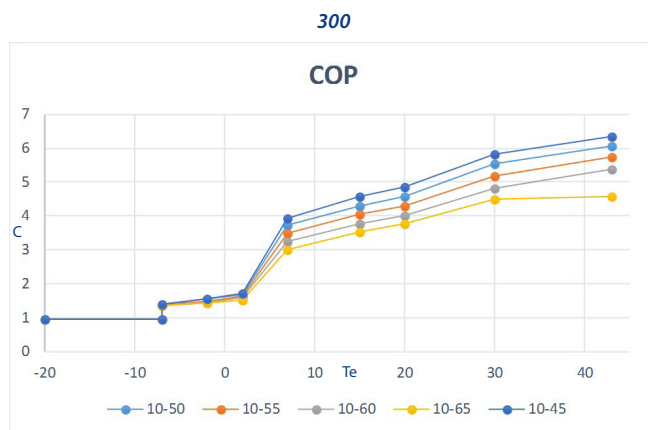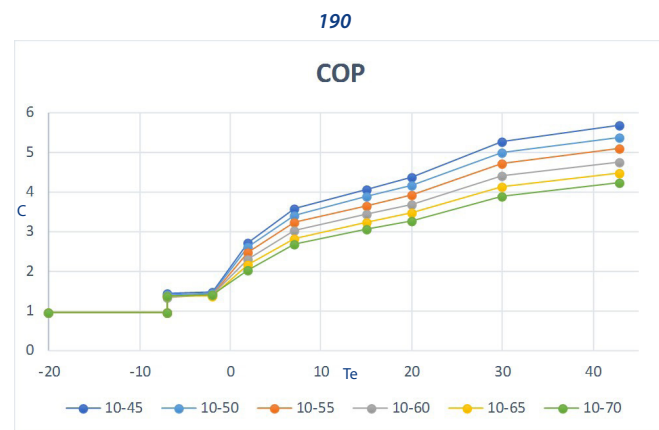

Dimensional and Installation

AQUA 190 - 190 S

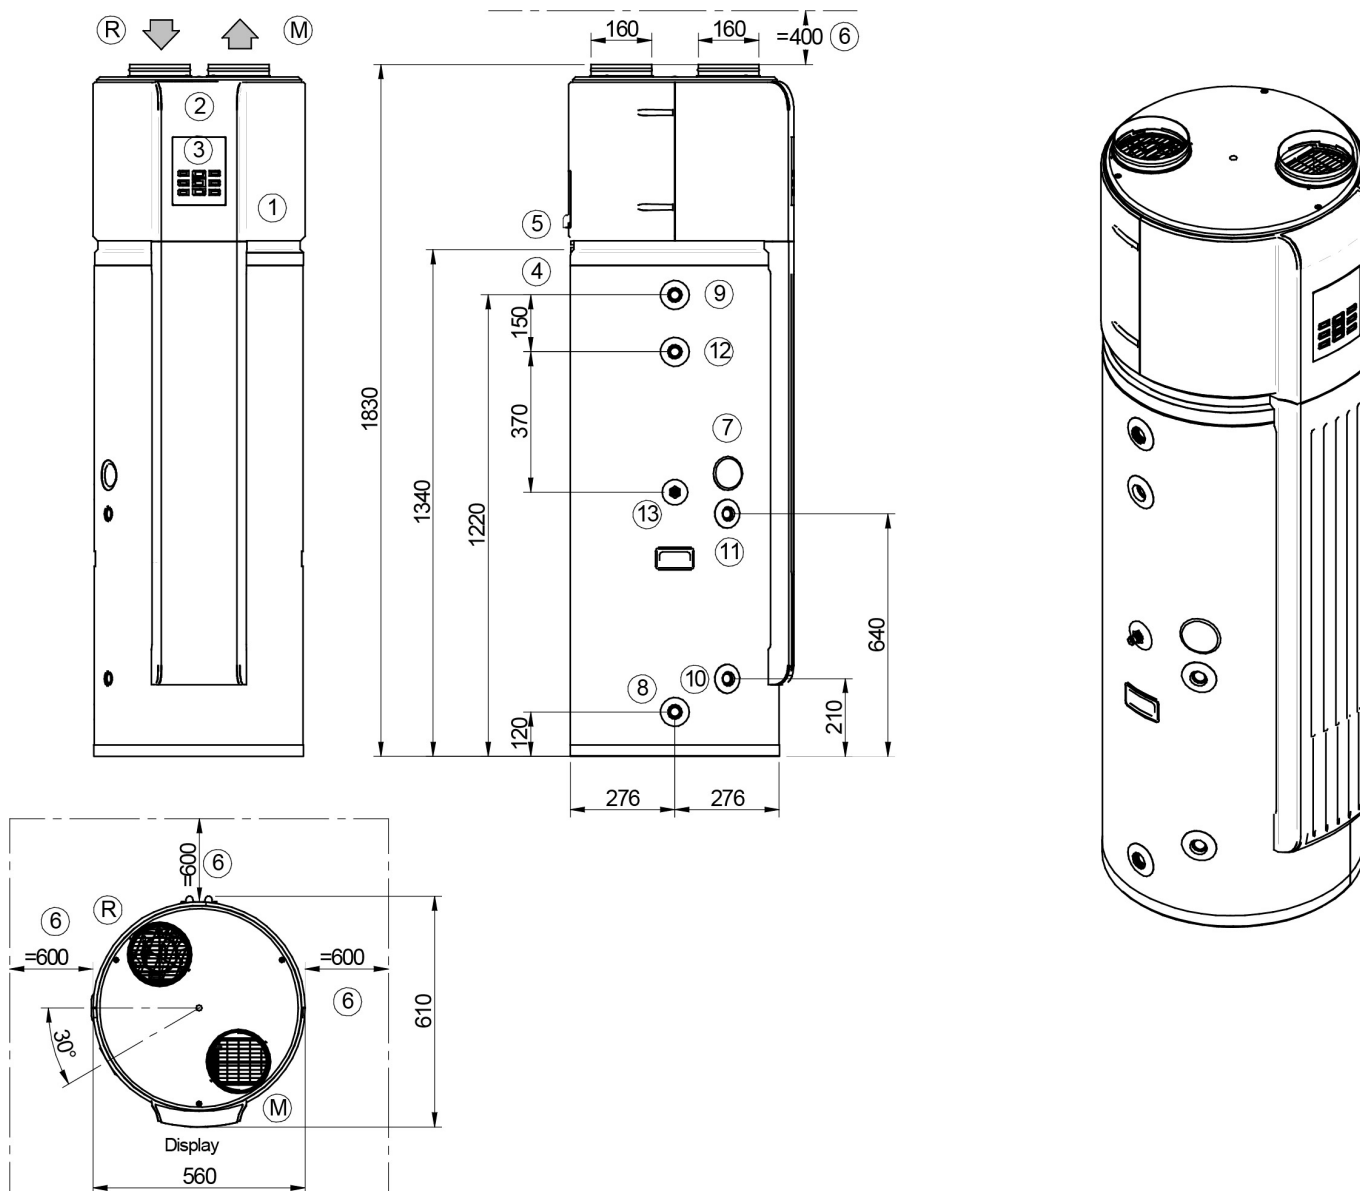


Table of weights

Size		190	190S
Weight during operation	kg	287	310
Shipment weight	kg	126	149
Shipment height	mm	2070	2070
Shipment depth	mm	680	680
Shipment width	mm	680	680

Legend

1	Compressor compartment	6	Operating space	11	Solar output 3/4" F (only 190S)
2	Electric panel	7	Anode in manganese	12	Hot water recirculation 3/4" F (only 190S)
3	Unit keypad	8	Water inlet 3/4" F	R	Air intake
4	Electrical line inlet	9	Water outlet 3/4" F	M	Air discharge
5	Condensation discharge	10	Solar inlet 3/4" F (only 190S)		

AQUA 300 - 300S

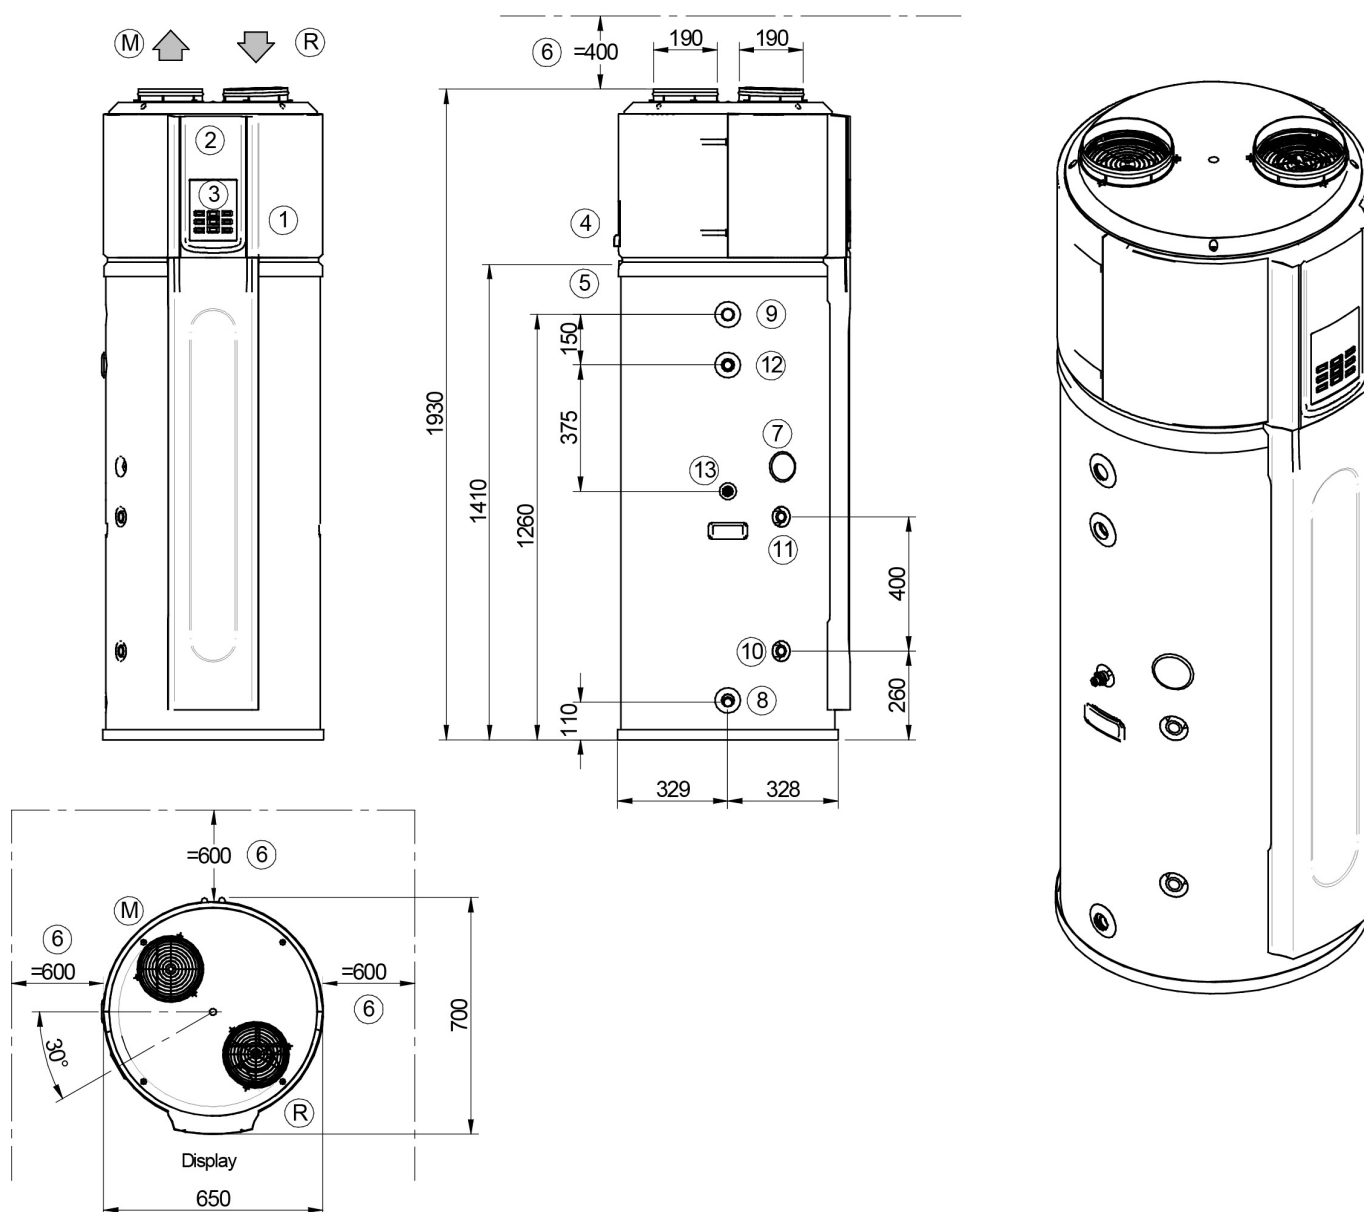


Table of weights

Size		300	300S
Weight during operation	kg	412	435
Shipment weight	kg	149	172
Shipment height	mm	2200	2200
Shipment depth	mm	775	775
Shipment width	mm	745	745


Legend

1	Compressor compartment	6	Operating space	11	Solar output 3/4" F (only 300S)
2	Electric panel	7	Anode in manganese	12	Hot water recirculation 3/4" F (only 300S)
3	Unit keypad	8	Water inlet 3/4" F	R	Air intake
4	Electrical line inlet	9	Water outlet 3/4" F	M	Air discharge
5	Condensation discharge	10	Solar inlet 3/4" F (only 300S)		


Hydraulic Connections

Below are some diagrams that give an idea of the hydraulic connections in the two versions of AQUA. The connection and design of the system must be done in conformity with national regulations that are currently in force.

190 - 300

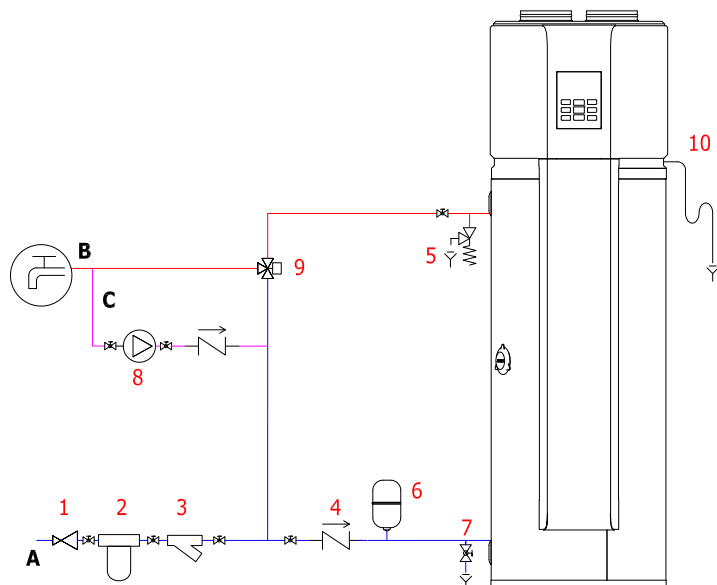

190S - 300S

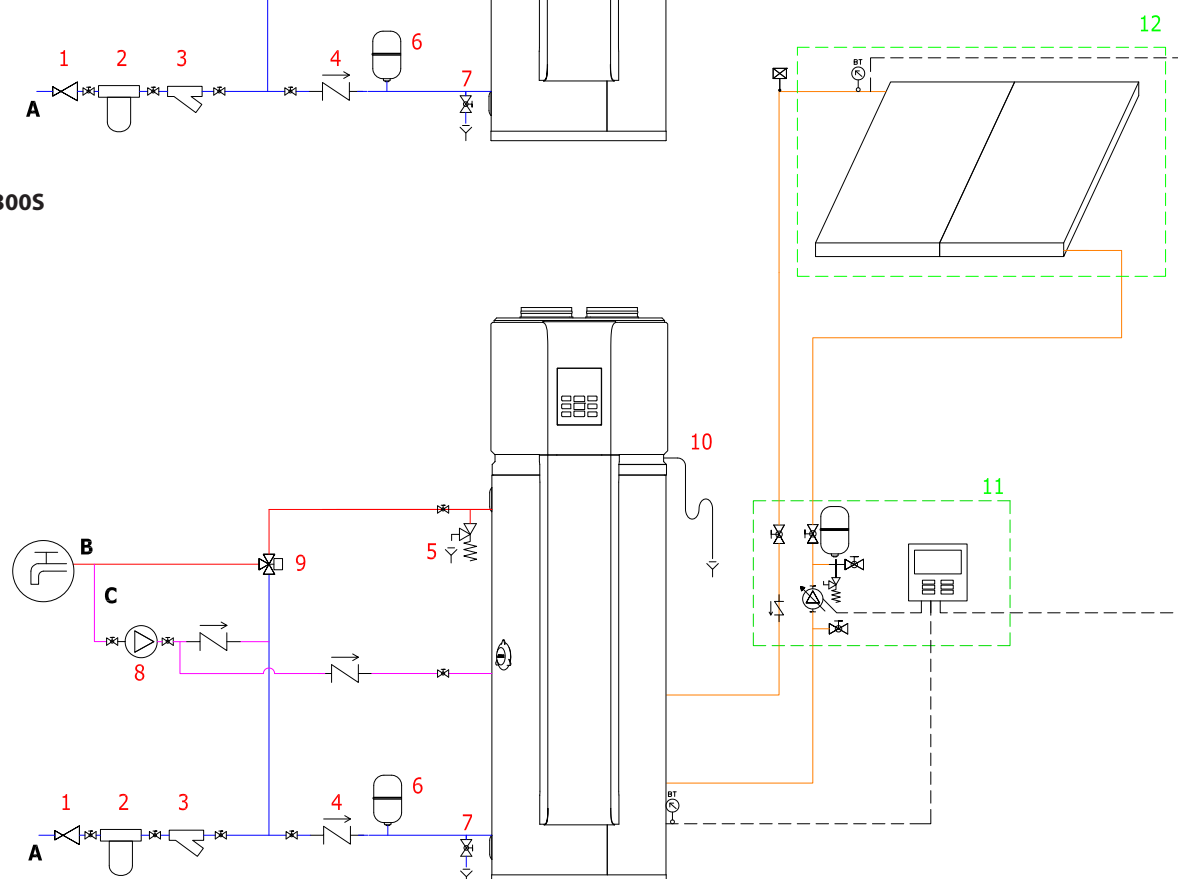

Legend

1 Pressure reducer	2 Water treatment devices (water softener, etc.)	3 Y strainer
4 Not return valve	5 Hot water safety valve with discharge	6 Hot water expansion tank
7 Accumulator discharge	8 Hot water circulator (recirculation) with not return valve	9 Thermostatic mixer valve
10 Condensation discharge	11 Solar circulation unit	12 Solar collectors
--- Accessory	X Client is responsible for this component	
A Water supply inlet	B Domestic hot water	C Domestic hot water recirculation


Aeraulic Connections

The unit must be installed inside the building, preferably in a technical room or a laundry room or a garage. At any rate, it is always preferable to avoid installing the unit near bedrooms or in rooms that must be protected from noise.

Outdoor installation is prohibited, as well as installation in places subject to external weather.


Examples below refer to the AQUA 190 version. For the AQUA 300 version, the expulsion and intake connections are inverted.

INTAKE AND EXPULSION DUCTS (recommended)

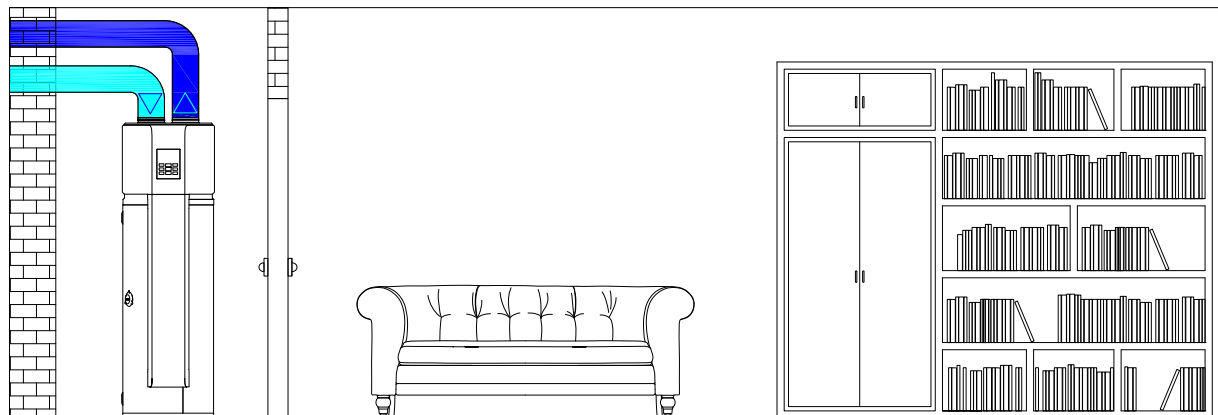


Channelling the intake and expulsion through ducts allows the unit to function with air taken from outside the house. Heat is extracted from the outdoor air, and used as a source for the heat pump. Later this same air is expelled outside the building. Therefore, unit operation does not cause an increase in heating requirements in the home. It is necessary to fit the system with correctly sized pipes in relation to the available pressure head supplied by the unit

INTAKE DUCTS (conditioned)

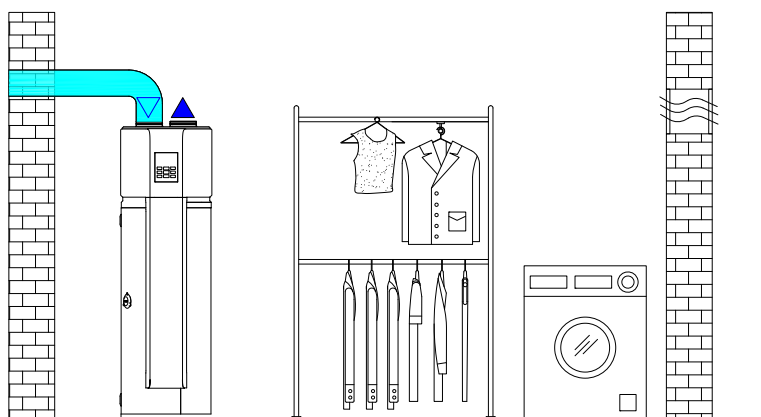

Installation with an intake duct and free expulsion is recommended if there is a desire to use the air expelled by the unit, cold dehumidified air (5-10°C colder than the intake air), to cool the room. The unit must be installed preferably in a room that does not require heating, because the unit releases cold air into the environment and it would increase the cost of heating that room. The unit must be installed in a room with a minimum volume greater than 15 m³. The expulsion air flow must be guaranteed and cannot be blocked. It is necessary that the vents be correctly sized.

EXPULSION DUCTS (conditioned)

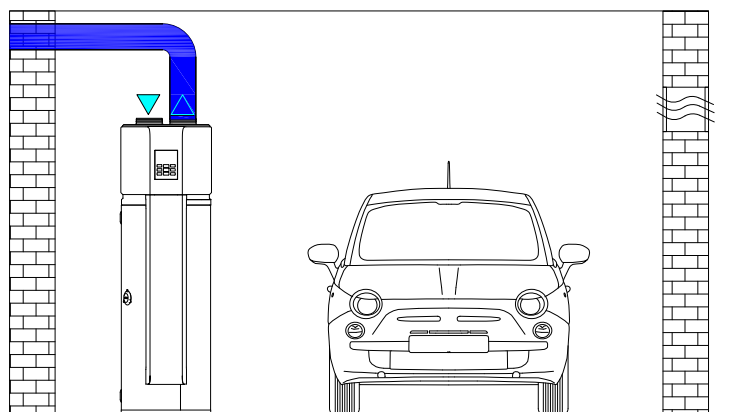

In this particular type of installation, the unit takes in air from the room where it is installed, extracts the heat and then expels that air outside the house. The unit must be installed in a room with suitable openings to allow the correct flow of air into the unit, which would prevent the air pressure in the room from falling. The unit must be installed in a room with a minimum volume greater than 15 m³.

Dati UNI EN

Clivet S.p.A. declares that the data to be used for the calculation according to UNI / TS 11300 Part 4 of the generation efficiency of the heat pumps of its production are those shown in the following tables.

The data contained in this document may be updated by the manufacturer in the case of upgrades of the range without prior notice.

UNI/TS 11300 Parte 4

AQUA

DHW Data Capacity and COP full load			Te			
	Te	Tm	7	15	20	35
190	P. Heat $\Phi_{H,HP out}$ (W)	55°C	1362	1609	1755	2254
	COP	55°C	3,22	3,66	3,93	4,86
300	P. Heat $\Phi_{H,HP out}$ (W)	55°C	1814	2185	2365	3006
	COP	55°C	3,49	4,04	4,30	5,03

Terms and definitions

Tm = Supply Temperature

Te = Outdoor Air Temperature

**CLIVET SPA**

Via Camp Lonc 25, Z.I. Villapaiera - 32032 Feltre (BL) - Italy
Tel. + 39 0439 3131 - Fax + 39 0439 313300 - info@clivet.it

CLIVET GROUP UK Limited

Units F5&F6 Railway Triangle Ind Est, Walton Road - Portsmouth, Hampshire - PO6 1TG - United Kingdom
Tel. + 44 (0) 1489 572238 - Fax. +44 (0) 2392 381243 - enquiries@clivetgroup.co.uk

CLIVET ESPAÑA S.A.U.

C/ Bac de Roda, 36 - 08019 Barcelona - España
Tel: +34 93 8606248 - Fax +34 93 8855392 - info@clivet.es

Av.Manóteras Nº 38, Oficina C303 - 28050 Madrid - España
Tel. +34 91 6658280 - Fax +34 91 6657806 - info@clivet.es

CLIVET GmbH

Hummelsbütteler Steindamm 84, 22851 Norderstedt - Germany
Tel. + 49 (0) 40 32 59 57-0 - Fax + 49 (0) 40 32 59 57-194 - info.de@clivet.com

CLIVET RUSSIA

Elektrozavodskaya st. 24, office 509 - 107023, Moscow, Russia
Tel. + 74956462009 - Fax + 74956462009 - info.ru@clivet.com

CLIVET MIDEAST FZCO

Dubai Silicon Oasis (DSO), High Bay Complex, Office N. 20, PO BOX 342009, Dubai, UAE
Tel. + 9714 3208499 - Fax + 9714 3208216 - info@clivet.ae

CLIVET AIRCONDITIONING SYSTEMS PRIVATE LIMITED

501/502, Commercial-1, Kohinoor City, Old Premier Compound, Kirol Road, Off L B S Marg, Kurla West - Mumbai 400 070 - India
Tel. +91 22 30930250 - info.in@clivet.com

www.clivet.com
www.clivetlive.com