



EMICON

INNOVATION AS ENERGY



AN ENEX TECHNOLOGIES COMPANY

EMIBYTE for IT COOLING

Products catalogue

Index

About	4
Our numbers	6
Our segments	8
DX.A DIRECT EXPANSION CLOSE CONTROL UNIT AIR CONDENSER WITH ON/OFF COMPRESSOR	16
DXi.A DIRECT EXPANSION CLOSE CONTROL UNIT AIR CONDENSED WITH INVERTER COMPRESSOR	24
DXi.AF DIRECT EXPANSION CLOSE CONTROL UNIT AIR CONDENSED WITH ADDITIONAL FREECOOLING COIL, INVERTER COMPRESSOR	28
DXi.H DIRECT EXPANSION CLOSE CONTROL UNIT WATER COOLED WITH INVERTER COMPRESSOR	32
DXi.HF DIRECT EXPANSION CLOSE CONTROL UNIT WATER COOLED WITH ADDITIONAL FREECOOLING COIL AND INVERTER COMPRESSORS	38
WU WATER COOLED CLOSE CONTROL UNIT	42
WUL WATER COOLED CLOSE CONTROL UNIT (EXTENDED VERSION)	46
IRDXi DIRECT EXPANSION CLOSE CONTROL UNIT AIR CONDENSED FOR HIGH DENSITY RACKS - 30 - 60 cm	50
IRWU WATER COOLED CLOSE CONTROL UNIT FOR HIGH DENSITY RACKS - 30 - 60 cm	52
RCE / RCE-S EXTERNAL CONDENSING FOR PRECISION AIR CONDITIONING UNITS	54
CONFIGURATIONS	60

About

Enex Technologies is a transformative world leader in natural and energy efficient cooling, heating, ventilation and refrigeration equipment that began in the 1930s by producing ammonia natural refrigeration equipment, later adding CO₂, water and propane as natural refrigerants with low global warming potential.

1934
SAMIFI
FRANCE
INNOVATION AS ENERGY

1968
kobol
HEAT EXCHANGERS NATURALLY

1948

MORGANA
HEAT EXCHANGERS NATURALLY

1984
EMICON
INNOVATION AS ENERGY

1983
ROENEST
HEAT EXCHANGERS NATURALLY


1993
Hidros
INNOVATION AS ENERGY

1999
ETHRATECH
INNOVATION AS ENERGY

1997
Arctic
INNOVATION AS ENERGY

2004
enex
INNOVATION AS ENERGY

Pioneers and innovators in natural HVACR since the 1930s

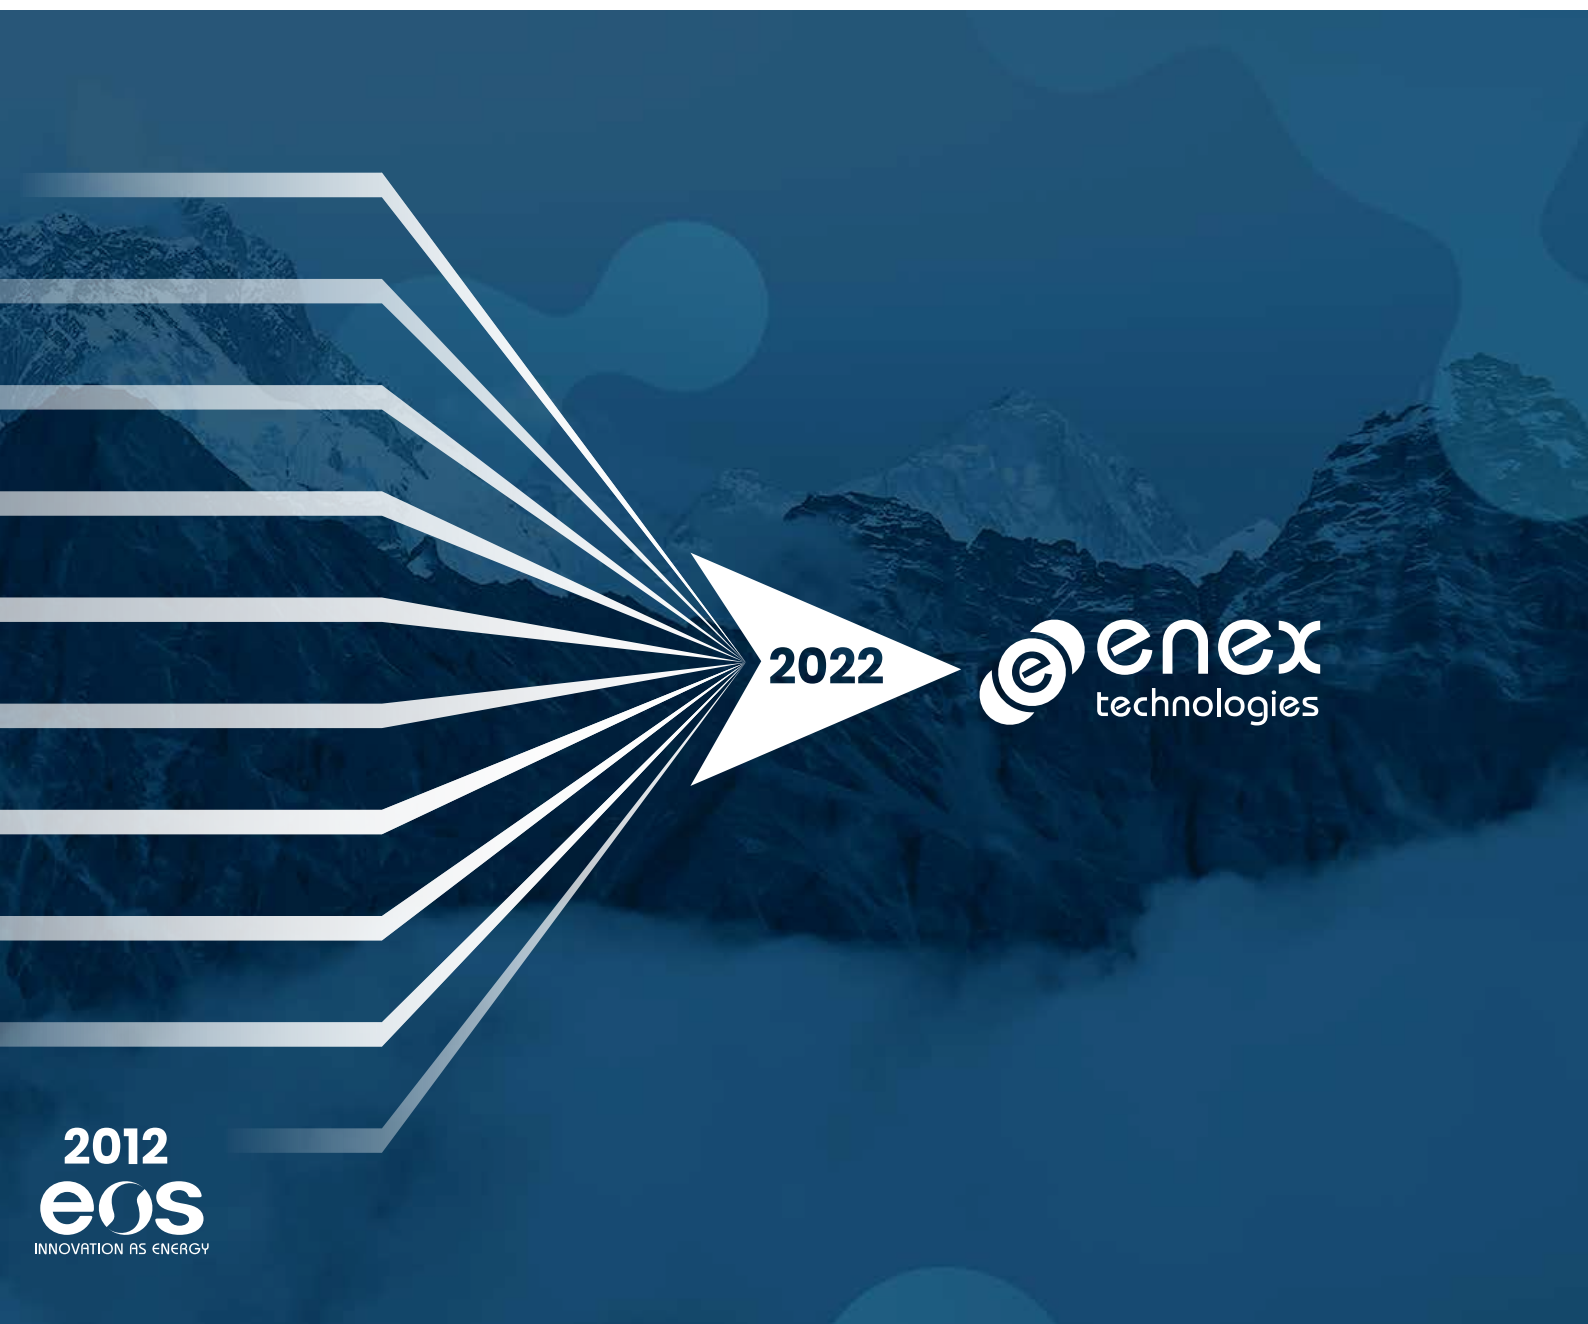

Our numbers

200M€
Revenues


1000+
Employees


12
Factories

125
Countries

★ Headquarter

● Manufacturing, R&D site and
commercial office

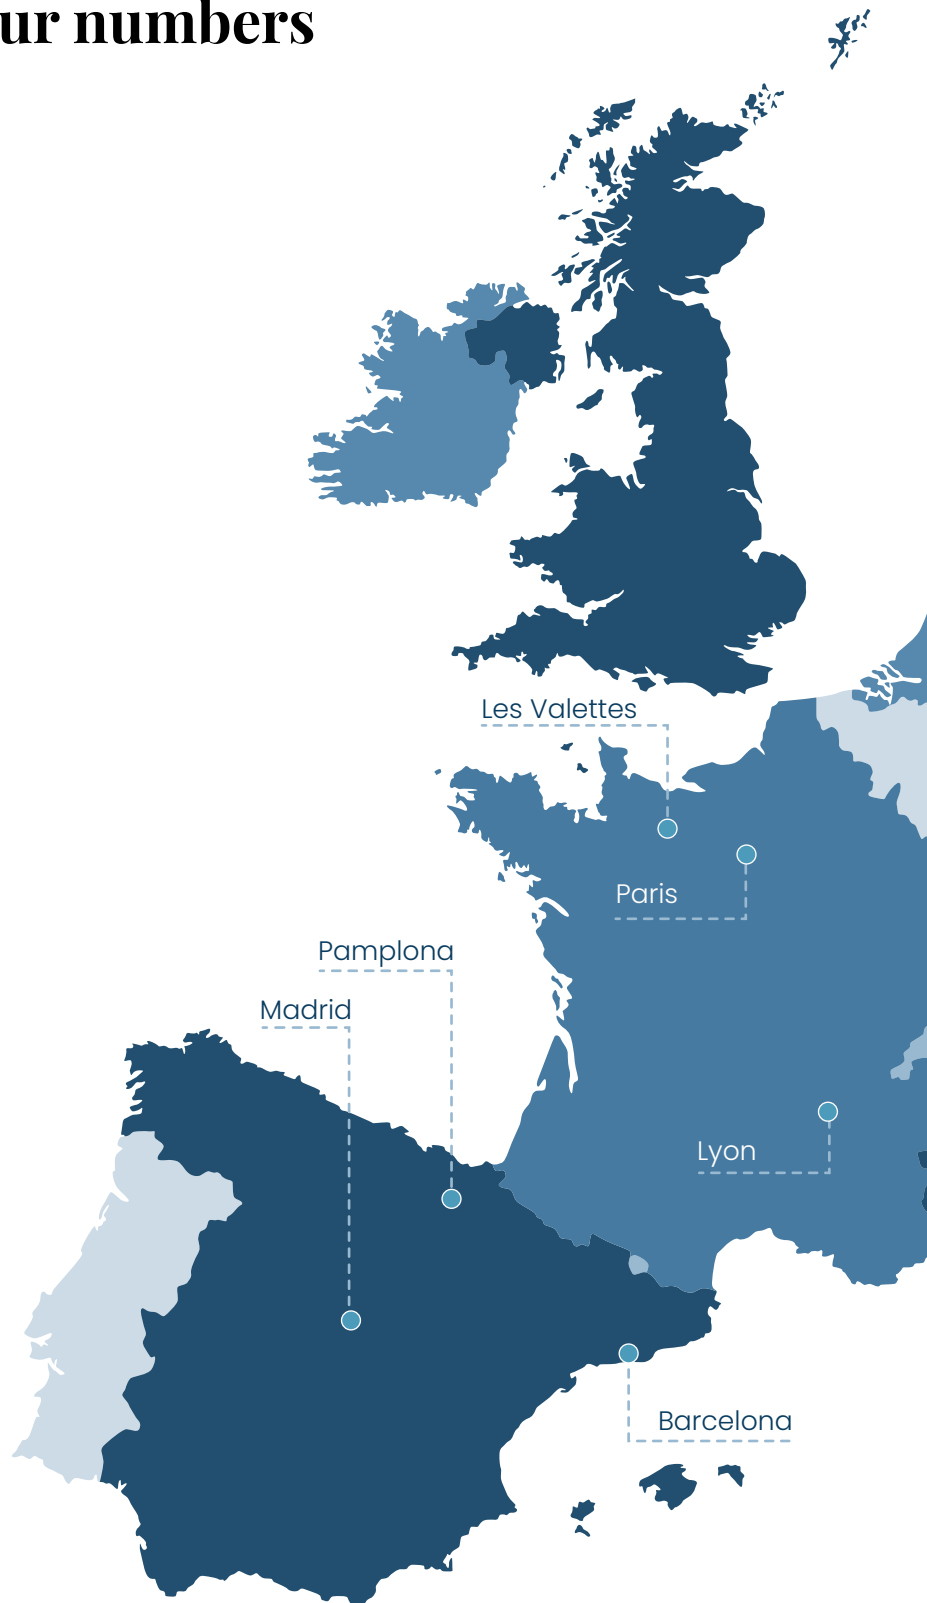

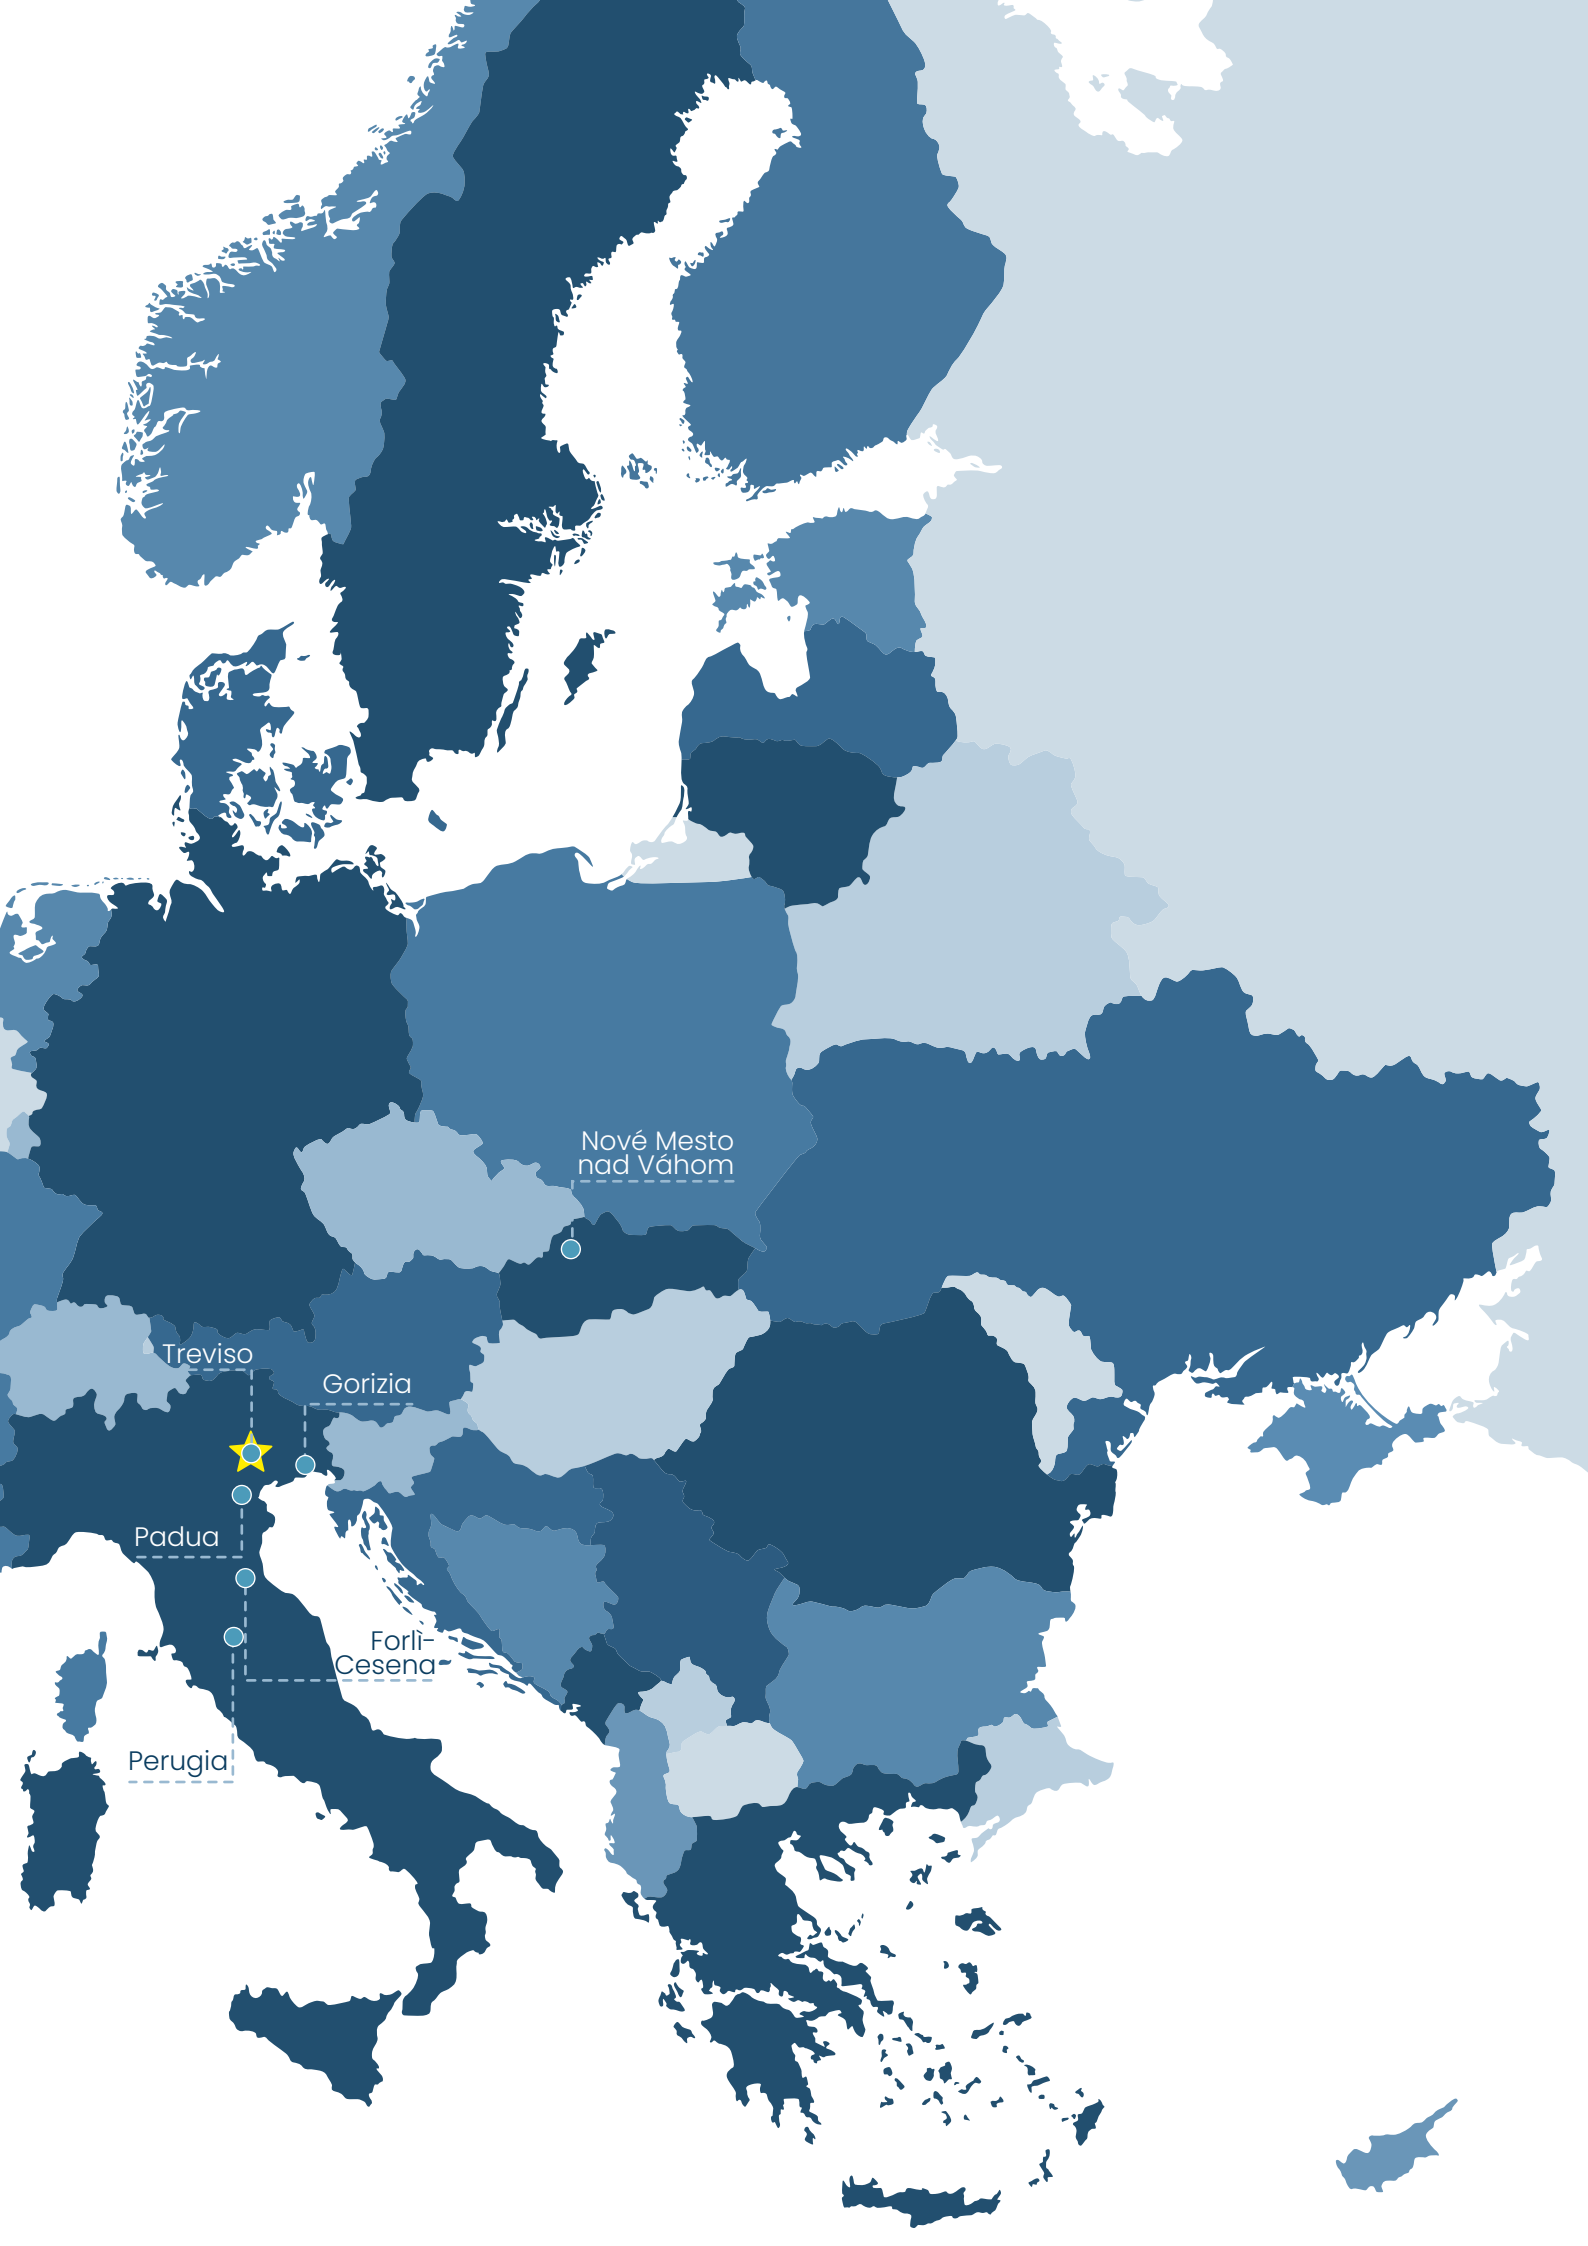

Nové Mesto
nad Váhom

Treviso

Gorizia

Padua

Forlì-
Cesena

Perugia

Our segments

Our leading natural refrigerant, energy efficiency and energy transition technologies transform the HVACR industry.



COOLING

Our chillers are designed to operate efficiently with all refrigerants, generating cold water for climatization or industrial processes.



REFRIGERATION

Our commercial and industrial refrigeration systems are designed for high performance, quality, reliability and carbon footprint reduction through the use of natural refrigerants Ammonia and CO₂.



HEATING

Our high efficiency heat pump range using natural refrigerant CO₂ is a simple-to use, elegant solution for applications requiring high quantities of sanitary hot water.

We are driven by strong values to create a better and more sustainable world



ENVIRONMENT

Buildings consume 40% of the energy used in the developed world. HVACR systems use 60% of the energy in buildings. Our high efficiency solutions are central to reducing global warming, and we strive every day to help our customers reduce their carbon footprint by using natural refrigerants.



INNOVATION

Always leading. From pioneering the efficient and safe use of natural refrigerants to helping the industry move away from gas heat towards systems that use electricity.



COMMUNITIES

We are a European industrial champion, building clean factories that support new jobs, growth and expansion to new markets.



DIVERSITY & INCLUSION

At Enex Technologies we ensure that every colleague feels respected, valued and motivated to support our customers, every day.

THE EMICON

LABS

CLIMATIC ROOMS

EMICON has **climatic rooms** and **testing stations** where units produced are subject to strict **functional** and **performance** tests, with the possibility of simulating the real design climatic conditions. A double hydronic circuit (hot and cold) allows to carry out **operation tests on all types** of units, both for IT Cooling and hydronic units, packaged, 2 or 4 pipes, air cooled, water cooled and split, up to a cooling capacity of 1500 kW.

It is possible, for our customers, to attend the functioning and performance test. Thanks to some webcams, it is possible to **remotely attend the test**.

CHARACTERISTICS

The climatic room is an environment inside of which, by means of auxiliary and heat recovery systems, we create a **controlled microclimate** in terms of air **temperature** and **humidity**, where the heat transfer fluids are treated according to the specific characteristics of the unit.

The types of units that can be tested are **air or water cooled units**, available as **chiller** or **reversible heat pump** versions according to **EN14511** standard.

The operating limits of fluid temperature can vary between **-5°C** and **65°C**. The ambient temperature (inside the room) can reach a maximum of 52°C for summer operation and a minimum of -7°C for winter cycle.

CLOSE CONTROL UNITS

EMICON's Laboratory allows the **performance test** of chilled water and air cooled direct expansion **close control units**, with the possibility to simulate climatic conditions from 15°C to 35°C.

PROPANE

We recently built a the test area **exclusively** dedicated to chillers and heat pumps operating with natural **Propane refrigerant (R290)**, making us able to carry out performance and functional tests of units with a cooling capacity up to 700 kW both in cooling only and in winter cycle reversible configurations. The use of **ATEX** components, refrigerant leak detection systems, connected to acoustic signals and forced-type exhaust systems guarantee a **high safety degree** in this area.



Mission critical **Cooling & Thermal management** has been Emicon core focus since 1984. Our range of precision air conditioning solutions have been designed for a wide range of applications where **close control, high precision cooling** is essential, including **data centres**, telecom switching stations, theatres, museum and high technological density environments in general. Throughout its history, the data center and server room has consistently been asked to do more: handle **more capacity**, deliver **more availability** and achieve **more efficiency**. Thanks to the resourcefulness and dedication of the people responsible for managing these business-critical facilities, they have largely responded. The question now is can they continue to do so within the existing paradigms, or are we on the verge of fundamental changes in data center technologies, designs and processes?



EMIBYTE

KNOWLEDGE AND
CONSOLIDATED
ITALIAN QUALITY
AT THE CENTER
OF YOUR DATA

The result to this main question nowadays is **EMIBYTE**, the new partner in **IT cooling** with his new series of products entirely designed and produced in the **Emicon factories**.

Reliable, integrated cooling, from **chiller** and computer room **air conditioners**, tackles the issues head on to lower costs and reduce downtime risk. We provide **all levels of heat removal** for different sized rooms and applications. Whether you're building new, retrofitting, or modernizing, achieve a **healthy data center environment** with our **EMIBYTE** cooling solutions.

LEGEND



Air cooled



Water cooled



Remote condensing



Free cooling



High efficiency



Silenced version



Ultra-silenced version



Cooling only



Scroll Compressors



Scroll inverter Compressors



R410a Refrigerant (Kc)



Axial fan with EC motor



Plug-fan with EC motor


SERIE

FEATURES

COMPRESSOR

FANS

REFRIGERANT



DX.A



DXi.A



DXi.AF



DXi.H



DXi.HF



WU



WUL



IR.DXi



IR.WU



RCE



RCE-S



COMPONENTS

FULLY CUSTOMIZABLE AND INTUITIVE TOUCH SCREEN DISPLAY

The new 4.3" touch screen designed to maximise the users system management experience. System usability is enhanced by the web server pages shown on the display relating to each individual controller connected to the network, allowing users to monitor the situation across the entire system from just one single location. Ethernet connectivity makes installation even more practical, without any constraints in terms of location relative to the monitored system.



BUILT-IN TEMPERATURE AND HUMIDITY PROBE

Can share the values read with the colour display making the comprehension of operating data easier.

Micro-USB port

At the front, concealed by a faceplate, for easier access.



INVERTER SCROLL COMPRESSOR

The best solution in terms of variable cooling capacity

PRECISE TEMPERATURE CONTROL

Inverter compressor-based technology allows close monitoring and control of room temperature.

ULTRASONIC HUMIDIFIER


Ultrasonic Humidifier option is the new ultrasound cool mist large room humidifier. It has been developed to control and maintain the desired level of humidity for a specific environment or in any large room or storage area constant.



EC PREMIUM FAN

The new generation of Emicon EC Fan 2.0 is the core of EMIBYTE Precision Air Conditioner, significantly minimizing noise levels and increasing the efficiency of the unit.



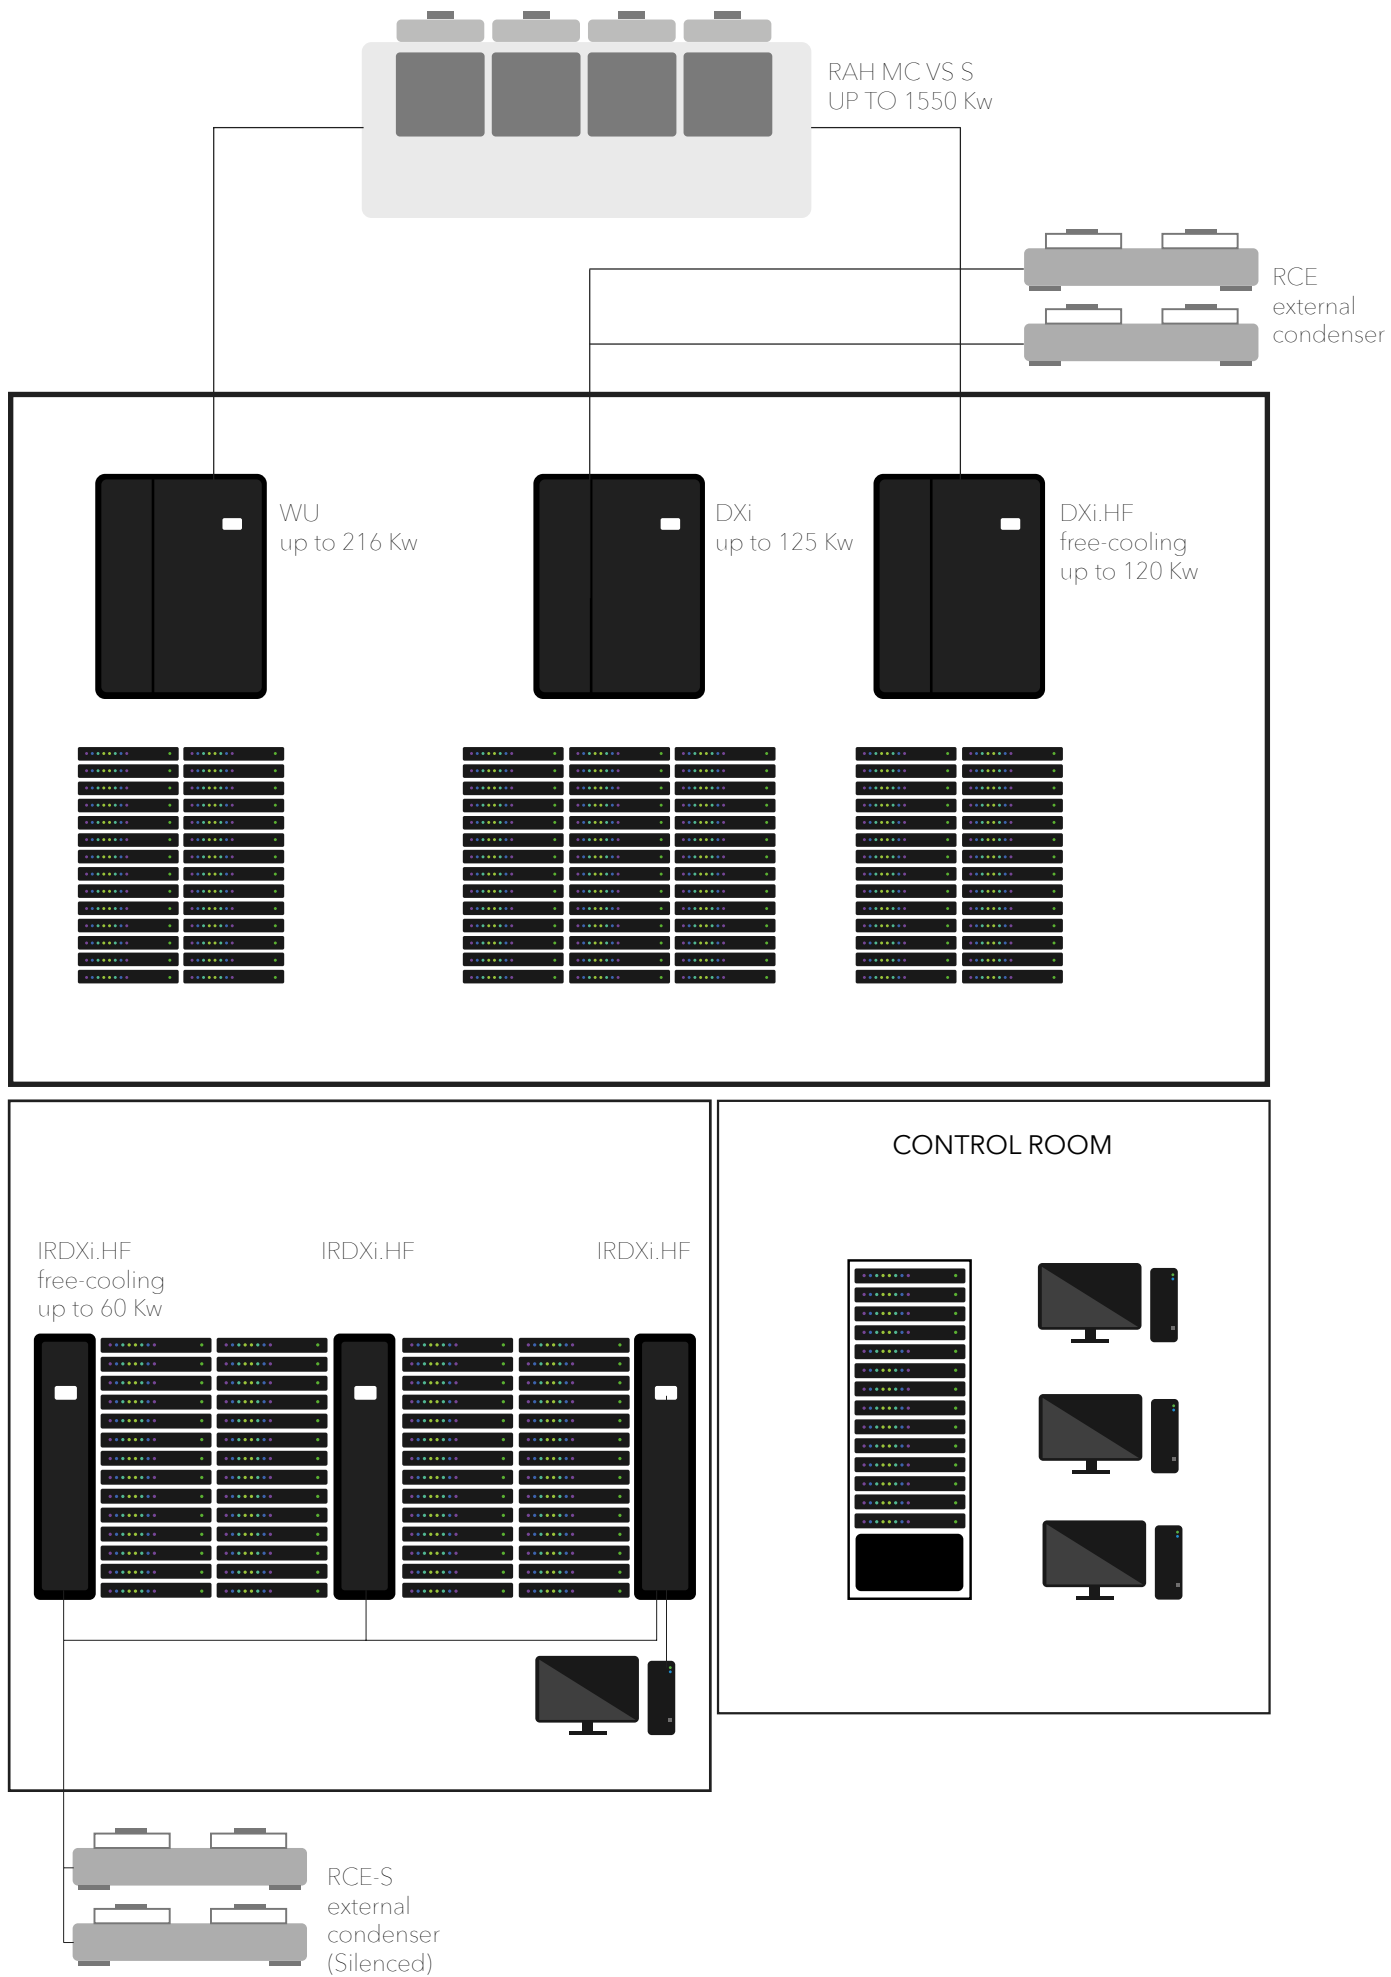

IRDXi

DIRECT EXPANSION CLOSE CONTROL UNIT

AIR CONDENSED FOR HIGH DENSITY RACKS

30 - 60 cm



The indoor vertical air conditioning unit RACK COOLER is an effective management system of the Hot Spots in the data center, ensuring low energy consumption and usage possibilities even under extremely high loads for HIGH DENSITY rack 'up and over 40 kW/m2 rack.



In the air cooled direct expansion version, the indoor unit is equipped with a hermetic inverter scroll compressor optimized for R410A refrigerant, EC fans with last generation electronically commutated brushless motors, to be matched to external condensers in standard or silenced version.



Efficiency

The unit combines the efficiency of use of last EC fans generation and a direct expansion system with inverter compressor allowing a great EER value. (Energy Efficiency Ratio). Thanks to the adoption of inverter DC brushless compressors, these units can reduce consumptions at part load, if compared to a traditional ON/OFF compressor.

Flexibility

The IR-DXi unit are both equipped with predisposition for passing refrigerant connections and power supply from both above and below, so as to allow a quick and easy installation in any condition, whether or not foreseen the presence of access floor.

Control management

The units are supplied with a new management algorithm capable of modulating the air flow and compressor capacity according to the effective environment heating load requirements. This system provides considerable benefits in terms of system management costs.

Compartmentization

Perfect integration with systems that minimize the mixing hot and cold air between the aisles and that emphasize the efficiency of such systems.

Control

Semi-graphic display 132x64 pixel, programmable software, record storage of 200 alarms, general alarm, automatic reset after blackout, integral LAN system, standby management, automatic rotation, serious alarms, operating contemporaneousness, clock function modality.

SPECIAL SERIES

IRDXi HF : Free-cooling water units

IRDXi AF : Free-cooling air units

IRDXi XF : DUAL FLUID version units

(Details on request c/o Emicon Ac Spa)

TECHNICAL DATA

IRDXi		IR30.DXi 12	IR30.DXi 22	IR30.DXi 27	IR60.DXi 40	IR60.DXi 50
Net Cooling capacity (Total) ⁽¹⁾	kW	12,9	20,6	27,8	40,0	52,7
Cooling cpacity (Sensible) ⁽¹⁾ ESP 20 Pa	kW	12,9	20,6	27,8	40,0	52,7
Tot. absorbed power ⁽²⁾ ESP 20 Pa	kW	3,88	5,21	7,59	9,65	13,10
SHR		1,00	1,00	1,00	1,00	1,00
Air flow	m³/h	3000	4000	5000	8000	9000
Fans	n°	3	4	4	4	4
ESP max.	Pa	194	179	218	142	72
Unit EER without remote condenser to max. frequency	W/W	3,6	4,3	4,1	4,5	4,4
Maximum absorbed power	kW	5,1	8,2	10,7	14,8	21,1
Maximum absorbed current	A	21,0	22,6	25,8	30,0	38,5
Power supply	V/ph/Hz	400/3/50+N+PE				
Humidifier						
Steam production (nominal)	kg/h	3	3	3	5	5
Steam production (max.)	kg/h	3	3	3	8	8
Max. absorbed power	kW	2,25	2,25	2,25	3,75	3,75
Max. absorbed current	A	10,0	10,0	10,0	5,5	5,5
Specific conducibility at 20°C (min/max)	µS/cm	300/1250	300/1250	300/1250	300/1250	300/1250
Total hardness (min/max)	mg/l CaCO ₃	100/400	100/400	100/400	100/400	100/400
Electrical heaters						
Steps	n°	1	1	1	3	3
Power	kW	3,0	3,0	3,0	9,0	9,0
Absorbed current	A	4,3	4,3	4,3	13,0	13,0
Condensing water pump						
Nominal flow	l/h	390,0	390,0	390,0	390,0	390,0
Max. flow (prevalence = 0 m)	l/h	500	500	500	500	500
Max. discharge height (flow = 0 m³/h)	m	5,4	5,4	5,4	5,4	5,4
Condensing water pump + humidifier						
Nominal flow	l/h	600	600	600	600	600
Max. flow (prevalence = 0 m)	l/h	900	900	900	900	900
Max. discharge height (flow = 0 m³/h)	m	6,0	6,0	6,0	6,0	6,0
Dimensions and weight						
Width	mm	300	300	300	600	600
Depth ⁽³⁾	mm	1100	1100	1100	1100	1100
Height	mm	2000	2000	2000	2000	2000
Weight	Kg	175	185	200	270	280

(1) Ambient temperature 24°C, Relative humidity 50%, Condensing temperature 50°C


(2) The fans electrical power has to be added to the ambient load.

(3) In the LL, LR and CL versions, the depth is 1200 mm.

CONFIGURATIONS


IR30.DXI / IR60.DXI - F

Frontal air flow

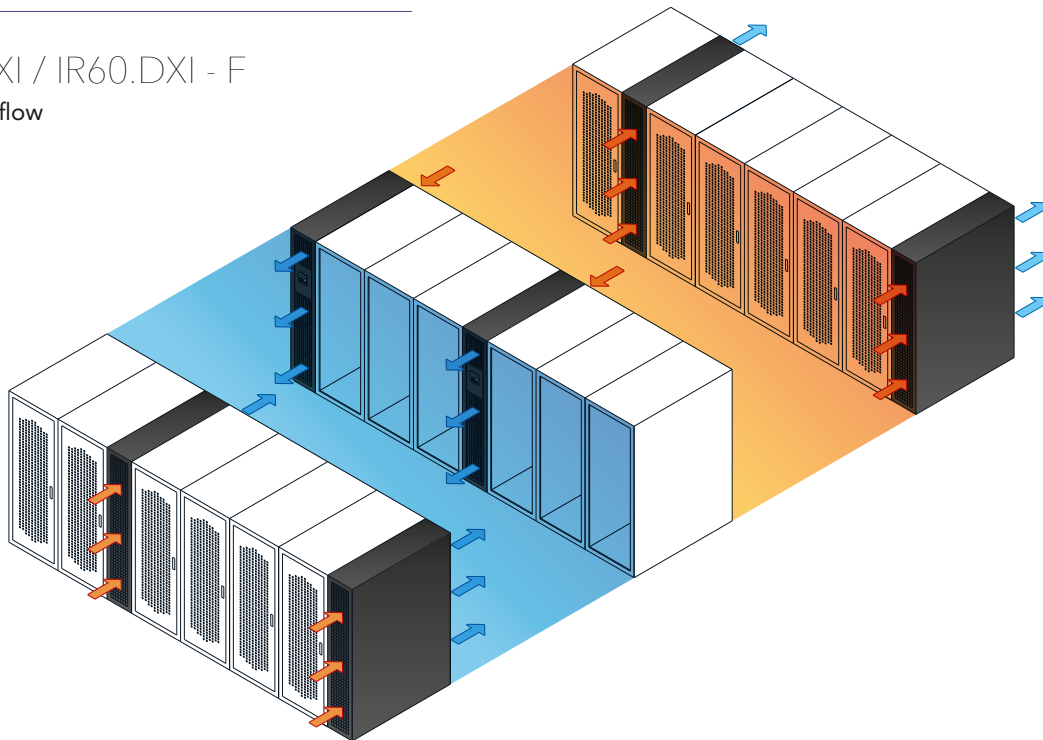


IR30.DXI - LR

Side air flow to the right

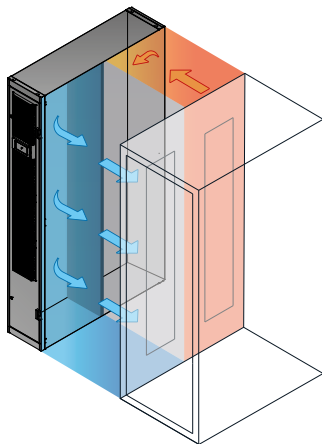


IR30.DXI - LL

Side air flow to the left

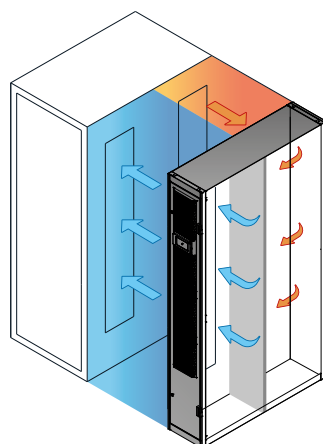


IR30.DXI - CL


Side air flow right and left (Close Loop)

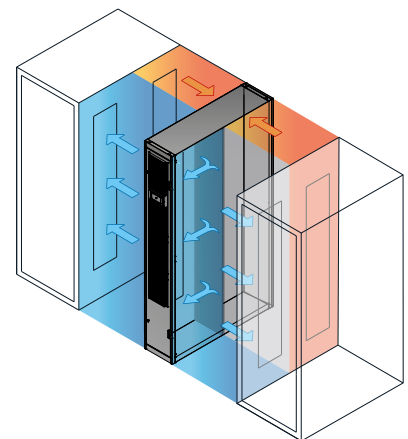


AIR FLOW CONFIGURATIONS: DX / DXI / WU




U




B



V



E



D

100



1601000004GB.24-02



www.enextechnologies.com • info@enextechnologies.com