



# High Static Pressure Duct High Efficiency

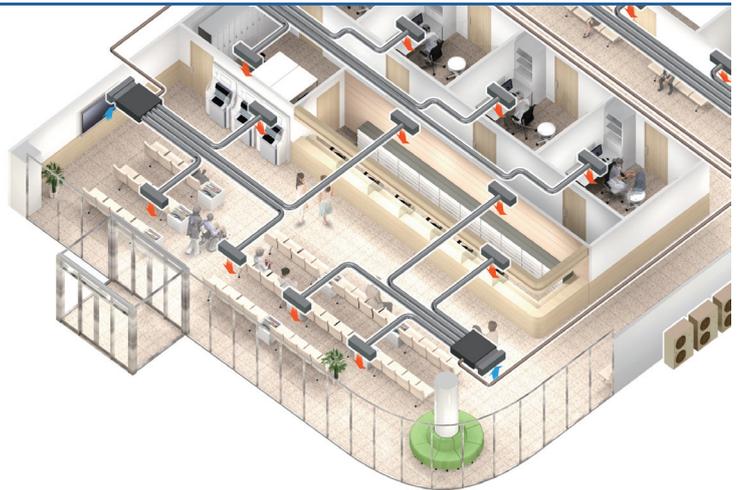

## Large airflow volume

It can be installed in places such as early replacement of air required by large airflow volume.


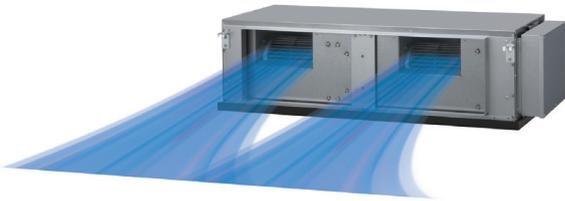


## Selectable with a wide range of static pressure

Static pressure range  
**50 to 250Pa**



## Installation styles

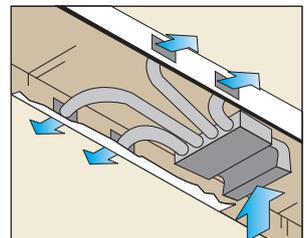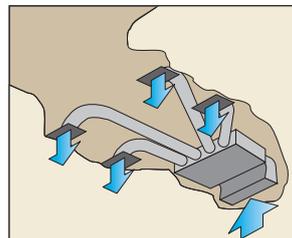

Model : ARXQ030GTAH \* Production by order



### Specifications

Model name			ARXQ030GTAH
Power source			Single phase, ~230V, 50Hz
Capacity	Cooling	kW	9.0
	Heating		10.0
Input power		W	306
Airflow rate	High	m <sup>3</sup> /h	3,200
	Med		—
	Low		—
Static pressure range		Pa	50 to 250
Standard static pressure			50
Sound pressure level	High	dB(A)	40
	Med		—
	Low		—
Net Dimensions (H × W × D)		mm	450 × 1,587 × 700
Weight		kg(lbs)	84 (185)
Connection pipe diameter	Liquid	mm	9.52 (Flare)
	Gas		15.88 (Flare)
Drain hose diameter (I.D./O.D.)			25/32

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

\*High Static Pressure Duct High Efficiency can be connected to V-III Series and VR-IV Series.

### Optional parts

Remote Sensor Unit : UTY-XSZX

IR Receiver unit : UTY-TRHX

### Dimensions

(Unit : mm)

