


Cassette Large type Circular Flow



Unique Circular Flow design

New Cassette type achieves a Circular airflow discharge in 360° direction by means of a high performance DC fan motor, new turbo fan and unique seamless airflow louver design.

- Ø7mm high density heat exchanger
- New DC fan motor
- High efficient turbo fan
- Seamless airflow louver

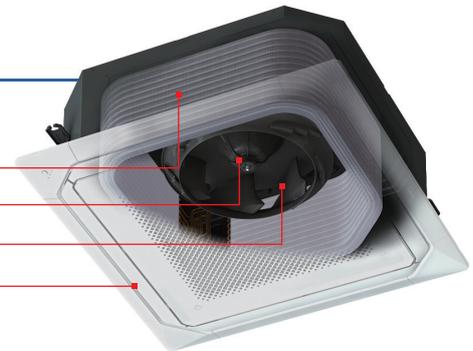

Uniform temperature air conditioning


Achieve a comfortable air conditioning spread to every corner of the room by circular flow & wide vertical airflow.



Individual louver control

Each louver can be set individually by Touch Panel Wired Remote Controller to enjoy the comfort of different directional airflows according to various room layouts.

* Touch Panel Wired RC (UTY-RNRYZ3) only

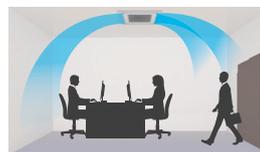

Comfortable air conditioning by preventing direct blowing of cold air and by providing swinging air flow simultaneously.



Efficient air conditioning based on the room layout

Human sensor increases more energy saving

Energy saving operation starts automatically by detecting the motion of a person. 2 modes of save operation mode and stop mode can be selected.

*Touch Panel Wired RC (UTY-RNRYZ3) only



Human sensor (Option)

2 modes can be selected

Auto saving Power is saved while people are away.

Auto OFF Operation stops after people go out.

**Model : AUXK018GLEH / AUXK024GLEH / AUXK030GLEH
AUXK034GLEH / AUXK036GLEH / AUXK045GLEH
AUXK054GLEH**



Specifications

Model name			AUXK018GLEH	AUXK024GLEH	AUXK030GLEH	AUXK034GLEH	AUXK036GLEH	AUXK045GLEH	AUXK054GLEH
Power source			Single phase, ~230V, 50Hz						
Capacity	Cooling	kW	5.6	7.1	9.0	10.0	11.2	12.5	14.0
	Heating		6.3	8.0	10.0	11.2	12.5	14.0	16.0
Input power		W	40	40	47	47	61	89	116
Airflow rate	High	m ³ /h	1,420	1,420	1,440	1,440	1,620	1,820	2,040
	Med-H		1,360	1,360	1,400	1,400	1,500	1,590	1,800
	Med		1,300	1,300	1,340	1,340	1,400	1,500	1,590
	Med-L		1,270	1,270	1,300	1,300	1,340	1,400	1,440
	Low		1,200	1,200	1,280	1,280	1,280	1,300	1,300
	Quiet		1,150	1,150	1,150	1,150	1,150	1,150	1,150
Sound pressure level	High	dB(A)	38	38	39	39	41	44	47
	Med-H		37	37	38	38	40	42	45
	Med		36	36	37	37	38	40	42
	Med-L		35	35	36	36	37	38	39
	Low		34	34	35	35	36	36	36
	Quiet		33	33	33	33	33	33	33
Dimensions (H × W × D)		mm	288 × 840 × 840						
Weight		kg(lbs)	26.5 (58)	26.5 (58)	29.5 (65)	29.5 (65)	29.5 (65)	29.5 (65)	29.5 (65)
Connection pipe diameter	Liquid (Flare)	mm	6.35	9.52	9.52	9.52	9.52	9.52	9.52
	Gas (Flare)		12.70	15.88	15.88	15.88	15.88	15.88	15.88
Drain hose diameter (I.D./O.D.)			25 / 32						
Cassette Grille	Model name		UTG-UKYC-W / UTG-UKYA-B						
	Dimensions (H×W×D)	mm	53×950×950						
	Weight	kg(lbs)	6.0 (13)						

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.

Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

When AUX*018GLEH is connected to the outdoor unit other than J-IVL, pipe diameter should be Ø9.52/Ø15.88 (Liq/Gas)

When AUXK036GLEH, AUXK045GLEH, and AUXK054GLEH are connected to the outdoor unit other than J-IVL, gas pipe diameter should be Ø19.05.

Optional parts

Human Sensor Kit: UTY-SHZXC
Wide Panel: UTG-AKXA-W
Panel Spacer: UTG-BKXA-W

Fresh Air Intake Kit: UTZ-VXRA
Air Outlet Shutter Plate: UTR-YDZK
Insulation Kit for High Humidity: UTZ-KXRA

Cassette Grille: UTG-UKYC-W, UTG-UKYA-B
External Power Supply Unit: UTZ-GXXA
IR Receiver Unit: UTY-LBHXD

Wireless LAN Interface: UTY-TFSXZ1

Dimensions

(Unit : mm)

